



## GENERAL CATALOGUE

We have been applying our technology  
***only to wood flooring*** since 1975.





We have been applying our technology  
***only to wood flooring*** since 1975.



Vermeister was founded in 1975 as a small family business and was amongst the first to be set up in the world of wood flooring, a sector for which it has a true vocation, offering a range of products for laying, treating and maintaining wood floors. Today, the company is under the management of Silvano and Marco Arzuffi, respectively the firm's CEO and COO. Certified according to the UNI EN ISO 9001:2015 standard which guarantees the efficiency of the company system, **Vermeister has always focused on developing solutions that protect the environment by performing constant research into the formulation and manufacturing processes of eco-friendly solutions.**

In fact, the company's attention to reducing its carbon footprints is evident in the various phases of the production cycle and the distribution, from the choice of raw materials to the manufacturing processes, from transportation to recycling and waste disposal. **Vermeister was the first company in the world in the "wood flooring" sector to formulate an emission-free product for treating wood floor** which, apart from being of an extremely high standard of quality, is the best in terms of its people and environment-friendly features.

Since 1975, at Vermeister we have dealt solely and exclusively with wood flooring and this dedication together with our experience enables us today to be considered a true reference point with regard to the treatment and maintenance of wood floors. Without being distracted by other markets, Vermeister has always concentrated and focused on just one "theme", thus giving added value to its "expertise". All our investments have been aimed at wood floors and, as a result, our know-how has developed more quickly. **Today, this aspect is widely acknowledged as our brand is present in over 60 Countries throughout the world.**





## Vermeister has been working on the basis of precise core values ever since 1975.

Vermeister has been working on the basis of precise core values ever since 1975. We refer to **RESPECT**, both for people and things, we refer to **HONESTY, FAIRNESS** and the **HOPE FOR A BRIGHTER TOMORROW**.

All this, summarised in just four words, embodies what we consider to be an invaluable asset which assists and guides us daily towards achieving marks of esteem and success. It is the very recognition that we receive that gives us the strength to overcome the countless difficulties that life and the world of work regularly lay in our path. This esteem confirms that we must be really grateful to those who taught us important lessons in the past. We think it's true to say that we are happy and satisfied with what we have become today and we feel certain that anyone in our place would say the same thing. This explains the bases on which we have built what we have today. **We could take the credit for having watered the seeds that were given to us, but the value of that great legacy is not due to us. Likewise, we cannot take the credit for the fact that along the way we have met many people who have helped us and considered us to be honest, reliable people with sound principles. And so here we are!**

THIS IS THE STORY OF VERMEISTER, A BEAUTIFUL STORY.

## 1975-TODAY= 400%

Today we can say that we have reached a milestone that we will never consider to be a point of arrival, but rather a starting point, leading towards continual growth.















## Pointing the way to the right product

Vermeister has always been outstanding for its highly innovative spirit.

It is with this same spirit in mind that we have tried to be innovative in our communication methods too, always prioritising the clarity of the information given.

The choice of a product depends on a careful analysis of the requirements of the installation site. To make this choice easier, we have classified our range under different categories according to the nature of the product and its destination of use.

All the sections have been coded with a pictogram that will appear in all the documents, including the technical data sheets.

	<b>ZERO CONCEPT</b>	10
	Range of products with low environmental impact	15
	<b>INNOVATION</b>	16
	Range of waterborne products	23
	<b>W.OIL</b>	24
	Range of oils to protect wood floors	33
	<b>CHROMOTHERAPY</b>	34
	Colouring systems	39
	<b>UNDERWOOD</b>	40
	Range of products for laying wood floors	51
	<b>SPORT &amp; FIREFIGHTING</b>	52
	Fireproofing and sports floors solutions	57
	<b>EXPERIENCE</b>	58
	Range of traditional and auxiliary products	63
	<b>MAINTENANCE</b>	64
	Maintenance products	71
	<b>MACHINES AND ABRASIVES</b>	72
		77
	<b>ACCESSORIES AND TOOLS</b>	78
		81



# Codifying our commitment towards mankind and the environment

In order to provide customers with the best guarantees, our products are tested for their performance, safety and environmental friendliness by the most authoritative institutes and independent bodies.



## EMICODE EC1

Emicode EC1 is a trademark belonging to GEV, Gemeinschaft Emissionskontrollierte Verlegewerkstoffe, an association that controls the emissions of flooring products, adhesives and building materials, of which Vermeister SpA is an official member. EC1 corresponds to the “very Low emission” class, the best available. Only those products which satisfy the most stringent requirements for the control of emissions can be certified and labelled “EMICODE EC 1” or “EMICODE EC 1 PLUS”.

## AIR QUALITY IMPROVEMENT (RULE 1113 ARCHITECTURAL COATINGS)

AQMD (SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT) is an American pollution control agency. AQMD has drawn up the SUPER COMPLIANT ARCHITECTURAL COATINGS MANUFACTURERS LIST which groups together those manufacturers who have been able to formulate a product that complies with the very strict evaluation criteria applied by the institute in compliance with RULE 1113.

## AIR QUALITY IMPROVEMENT (RULE 1168 ADHESIVE AND SEALANT APPLICATIONS)

As far as adhesives and sealants are concerned, AQMD has set restrictive parameters in compliance with RULE 1168, which establishes limits for the content of VOC and prohibits the use of some substances considered to be extremely dangerous.

## QUALITY MANAGEMENT SYSTEM CERTIFIED UNI EN ISO 9001:2015

A keenness to perform in-depth research has no value unless it is backed by an equally efficient organisation and for this reason, in Vermeister we work using the “Quality Management System: UNI EN ISO 9001:2015” which enables us to: optimize the use of internal and external resources, qualify our presence on the market, reduce the production costs of goods and services and guarantee the consistency of our production.

## INDOOR AIR EMISSIONS

In France, as from 1st January 2012, construction products installed indoors must bear a label certifying, in a specific and simple way, their level of emission of volatile organic compounds. The level of emission of the product is shown by a class which ranges from A+ (very Low emissions) to C (high emissions). Vermeister products in the Zero concept and Innovation ranges (as well as some products in other ranges) fall within the A+ class. The purpose of this labelling is to provide consumers with clear information about the VOC (volatile organic compounds) emitted by the products after 28 days of testing.

IMPORTANT NOTE: The water based products are obviously not in a solvent base. Thanks to this play on words and an easy misinterpretation, water based products are often mistakenly defined as “solvent free”. This is incorrect because even water based products contain solvents, their proper name being “coalescents”. Vermeister was the first company to formulate a water based finishing product, ZERO VOC, which is also “solvent free”.

## Codifying our solutions

**FORMULATED WITH RENEWABLE RAW MATERIALS** | The use of green technologies and renewable materials is fundamental for the competitiveness, sustainability and safety of medium and long term supply sources. In Vermeister we promote the use of renewable raw materials in order to improve the performance and reduce the environmental impact of our products.

**SOLVENT FREE** | The absence of solvents ensures a very low emission of volatile organic compounds, both during use and after the floor has been laid, guaranteeing a better work environment and a low environmental impact.

**COBALT AND KETOXIMES FREE** | Cobalt compounds are used as siccatives in oil based products and for some years they have been classified as suspected teratogenes (harmful effect on the unborn child) and toxic for the aquatic environment. Methyl ethyl ketoxime, which has always been used as an anti-skinning agent in oil based products, has been classified as a suspected carcinogen for several years. The absence of this substance guarantees a better work environment, both during use of the product and after the floor has been laid, as well as a low environmental impact, to ensure a high level of home comfort.

**PERMANENT ANTI-SCRATCH SYSTEM** | Thanks to the PASS system, the anti-scratch agents are distributed on the surface of the finish and remain “secured” to the polymer by means of indissoluble chemical bonds. In this way they are not removed by washing or by traffic so that the non-scratch properties remain unchanged over time.

**SELF CROSS-LINKING SYSTEM** | The Self Cross-Linking System S-XL, enables compounds to be added to the coatings that activate after the evaporation of the water and give rise to a true chemical cross-linking. In this way performances are achieved similar to those of two component coatings with single component coatings as if component B had already been added to them.

**EN 14904** | The EN 14904:2006 standard establishes the technical requirements that flooring for sports halls must satisfy. Particular attention is given to important requirements regarding safety and sports-related features that also concern the treatment of the wood floors. In this instance, consideration is given to: friction (i.e. non-slip properties), resistance to wear and a mirror finish. The Vermeister products bearing this logo comply with the most stringent tests stated in the EN 14904:2006 standard.

**LOW VOC** | European directive EC 2004/42 set limits for the emission of volatile organic compounds (VOC) produced by the solvents contained in finishes. All Vermeister products comply with these parameters.

**NMP FREE** | NMP (N-methyl-pyrrolidone) is a solvent used in the production of water based finishes, which is classified as dangerous due to the possible negative effects it may have on the reproductive cycle. Since 2007 Vermeister has been formulating only NMP-free water based products.

**MDI FREE** | MDI, Methylenediphenyl diisocyanate, used in the synthesis of polyurethanes and polyisocyanates, is classified as a suspected carcinogen. Together with the above-mentioned polymers, it is found as a free monomer, generally in quantities lower than a certain threshold value, in order to ensure the utmost safety of operators in the sector. The absence of this substance guarantees a better work environment, both during use of the product and after the floor has been laid, as well as a low environmental impact to ensure a high level of home comfort.

**NANO SCALE SYSTEM** | Thanks to the use of Nano technology, the NSS system produces coatings that stand out from the rest due to their exceptional resistance, especially their resistance to scratching.

**PRHS TECHNOLOGY** | The exclusive PRHS (PERFECT RIDGE HEIGHT SYSTEM) technology improves the specific rheology of the product quite considerably in compliance with the UNI EN 14293:2006 specification, leading to a very spreadable adhesive with a perfect ridge height at any temperature.

**DUAL CURE TECHNOLOGY** | The DCS (Dual Curing System) technology enables the cross-linking of both a single component paint and, after the addition of a hardener, a two-component paint. Thanks to this particular “dual cross-linking” the paint is outstanding for its speed of drying when used as a single component and for its high resistance to abrasion, scuff marks and chemical products when used as a two-component paint, making it ideal for treating floors subject to heavy traffic.

**3D TECHNOLOGY** | The exclusive 3D technology has made an enormous improvement to the sandability of the system without compromising the high build and coverage and, as a consequence, the wooden surface is given an appropriate level of insulation after just one coat. It's a special three-dimensional molecular structure that guarantees a subsequent uniformity of absorption, perfect adherence and a tangible improvement in the coverage of the subsequent coats of finish.

**SILVER IONS TECHNOLOGY** | The antimicrobial properties of ionized silver were already well-known in antiquity. In fact, it is believed that silver not only has antimicrobial, but also anti-viral and antimycotic properties. Against viruses: by inserting itself between the complementary nitrogenous bases, silver causes the denaturation of viral DNA molecules. Against fungi: by attaching itself to the cellular wall, silver migrates inside it and neutralizes its functionality. Against bacteria: silver disactivates the enzymes responsible for the oxidative metabolism, causing the death of the single-cell organism. In-vitro studies have demonstrated that silver is particularly effective against E. coli and Staphylococcus aureus, respectively Gram-negative and Gram-positive bacteria generally used as the basic criterion in bacterial load reduction tests in accordance with ISO 22196:2011.





## ZERO CONCEPT

Only the use of products with a low environmental impact actually contributes towards safeguarding the environment. The healthiness of home and work environments is becoming more and more important as each day passes and for this reason we are seeing a growing awareness on the part of our customers and end users who are increasingly mindful of aspects concerning the health.

**Vermeister has become more and more committed over the years to carrying out research and developing products that safeguard the environment, the health of the user and those living where the products are applied**

ZERO CONCEPT is a range of products with an extremely low environmental impact and a very low content of volatile organic compounds, all formulated using renewable raw materials and offering a far superior chemical/mechanical performance.



**Each product in the ZERO CONCEPT range guarantees a high level comfort for living areas and contributes towards daily well-being by combining an aesthetic value with the naturalness of raw materials.**

Tested and certified by prestigious independent authorities for their high standard of quality and respect for precise environmental criteria, the products in the ZERO CONCEPT range are provided with a certificate and "EMICODE EC1" mark as a result of their very low emission of volatile organic compounds. It is important to remember that use of the ZERO CONCEPT products in a work cycle drastically reduces the emission of solvents and other volatile organic compounds.







Protective waterborne finish that is completely solvent-free. ZERO VOC can be used both as a single component or as a two component finish after adding ZERO VOC BOOST. Produced with renewable raw materials, ZERO VOC is ideal for green building and when applied directly on the wood it leaves the shade unaltered and provides a very natural effect.

QUICK FACTS	
Low environmental impact certified EC1 PLUS	
Zero Voc	
Highly ecological – re-use of leftover product - no wastage	
Hardener has no hazard label	
Solvent-free	
Formulated with renewable raw materials	

TECHNICAL NOTES	
Dry for sanding (hours)	3
Degree of gloss - Zero VOC X-MATT 15 (gloss)	15
Degree of gloss - Zero VOC 30 (gloss)	30
Degree of gloss - Zero VOC 60 (gloss)	60



Consisting of a blend of particular vegetable oils, ZEROIL has been formulated to give softness and warmth to wood floors. The special composition of ZEROIL enhances the natural appearance of the wood and protects it from the inside while highlighting the grain. The high content of natural compounds and the absence of any volatile organic compound (VOC) together with the low environmental impact make ZEROIL the ideal product for green building. ZEROIL provides the treated surfaces with high level resistance and water repellency, **in just one coat**.

TECHNICAL NOTES	
Application method	Roller, Brush, Pad
Average coverage per coat (g/m²)	30/50
Max. interval before polishing (min.)	10/15



A new generation two component epoxy polyurethane solvent and water free adhesive for gluing wood flooring of any size on concrete screeds, including heated ones and on non-absorbing surfaces (ceramic tiles, stoneware, marble, etc.). It is also ideal for laying planks and engineered wood floors. A real evolution: ZERO% asserts itself in a new version with an improved rheology making it easier to spread and leading to a perfect ridge height. ZERO% is outstanding for the fact that it is almost insensitive to changes in the temperature (seasonality), completely odour-free both before and after mixing, and offers excellent hold and wettability under any environmental condition. The coverage has also been considerably improved. The high coefficient of elasticity after hardening completes the features of the ZERO% revolutionary adhesive together with its unbeatable characteristics of adhesion and toughness. **Being certified EMICODE EC1, ZERO% may apply for the awarding of the EQ credit for Indoor Environmental Quality – Low-Emitting Materials of the new international certification standard LEED v4.**

QUICK FACTS	
Low environmental impact certified EC1	
Solvent-free	
Very good reactivity even at low temperatures	
Sensitivity to temperature changes (seasonality) has been eliminated - consistent viscosity	
Considerably reduced odour of component B	
Excellent coverage	
Excellent spreadability	
Perfect ridge height	

TECHNICAL NOTES	
Pot-life (hours)	2
Open time (min.)	60
Ready for traffic (hours)	24/48
Interval before sanding (days)	3
Average coverage (g/m²)	900/1400



Single component moisture-cure silane-terminated adhesive that does not contain water, solvents, isocyanates, epoxy or amino compounds and for this reason does not bear any health or risk warnings or symbols. The EC1 PLUS classification certifies the very low emission of volatile organic compounds both when being applied and once the floor is in use. **Being certified EMICODE EC1PLUS, ZEROMONO may apply for the awarding of the EQ credit for Indoor Environmental Quality – Low-Emitting Materials of the new international certification standard LEED v4.**


QUICK FACTS	
Low environmental impact certified EC1 PLUS	
Certified soundproofing qualities (insulation from footsteps)	
Certified Heat Resistance	
No hazard labels	
Exceptional adhesion	
Permanent elasticity	
Does not stain pre-finished floors, no marks	
High level coverage	
Perfect ridge height	

TECHNICAL NOTES	
Open time (max. registration time) (min.)	45/60
Open time (surface skin formation time) (min.)	100/120
Ready for traffic (hours)	24
Interval before sanding (days)	4
Average coverage (g/m²)	800/1000



## Zero Filler

Waterborne binder for fillers



Solvent-free waterborne binder for preparing fillers to seal wood floors. It is blended with wood flour obtained by sanding with a fine grit sandpaper to create a filler of the same colour as the floor. Ideal for waterborne coating cycles. Zero emissions. Not suitable for Merbau.

### QUICK FACTS

Low environmental impact certified EC1 PLUS
No hazard label
Solvent-free
Fast drying
Ready for sanding after 1 hour
Completely odourless
Long workability
High solid content
Greater elasticity
Can already be sanded in the intermediate phase with a 60/80 grit sandpaper

### TECHNICAL NOTES

Completely dry (min.)	60
Ready for sanding (min.)	60
Ready for coating (min.)	60
Average coverage (g/m <sup>2</sup> )	100/120
Application method	Stainless steel/ plastic trowel

## Zero Deck

High performance eco-friendly  
water-oil for outdoor use



High performance water-oil formulated specifically for outdoor use. ZERO DECK not only brings out the smoothness but also brightens the tone of the wood. Free of heavy metal hardeners, it does not give rise to phenomena of self-combustion like traditional oils. Although its VOC values are insignificant, ZERO DECK is a product for outdoor use and, therefore, EC1 classification is not provided for.

### QUICK FACTS

Greater coverage compared with traditional products
Excellent shading property
Greater penetration in the wood compared with a solvent based product
Easy to restore: it does not require sanding
Protection against UV rays
Prevents greying maintaining the natural colour of the wood
Excellent water repellence

### TECHNICAL NOTES

Application method	Roller, Brush or Pad
Average coverage per coat (g/m <sup>2</sup> )	50/100
Interval before the second coat (hours)	After 6, within 24



**Respectful  
of the environment,  
of the health of the user  
and of those who live where  
the products are applied.**





## 17



# Velvet

Single component waterborne  
“soft to the touch” treatment



Single component polyurethane waterborne finishing treatment with S-XL technology, formulated with renewable raw materials. Floors treated with VELVET have a completely natural appearance and a unique, velvety feel to the touch. Thanks to the high solid content and the extraordinary drying speed, the product allows very fast work cycles to be carried out (1-2 hours according to environmental conditions). Another very important feature is the ease with which the floors can be touched up if the surface is damaged or in the event of localized defects: in fact, work can be carried out just on those areas by marking them off with tape, sanding them and then reapplying the product. When the surface is dry, there are no signs of marks or imperfections. For rooms subject to heavy traffic, we recommend adding 10% VELVET IMPROVER to the last coat.

### QUICK FACTS

Low environmental impact certified EC1	
Natural effect	
Velvety feel to the touch	
Possibility of fast cycles (1-2 hours)	
Possibility of invisible touch ups	
Ideal for heavy traffic with the addition of Improver	

### TECHNICAL NOTES

Dry for sanding (hours)	1,5
Degree of gloss (gloss)	5

# Silk

Single component waterborne finish



Single component polyurethane waterborne finish featuring exceptional resistance to abrasion and to scuff marks which makes it ideal for use in every situation. From the point of view of appearance, it differs from traditional waterborne products due to its considerable transparency, for the cleanliness of the film and above all for the warm tone that it confers on the wood, avoiding the “whitening” typical of other waterborne finishes.

### QUICK FACTS

Low environmental impact certified EC1	
Exceptional resistance to abrasion and to scuff marks	
Great transparency	
Good toning effect	

### TECHNICAL NOTES

Dry for sanding (hours)	8
Overcoating without sanding (hours)	After 3, within 5
Degree of gloss SILK 30 (gloss)	30
Degree of gloss SILK 60 (gloss)	60
Degree of gloss SILK 90 (gloss)	90

# Flame

Two component waterborne  
sealer with toning effect



Two component waterborne sealer with a very low content of volatile organic compounds (VOC). The composition of the product based on the latest generation of resins allows the wood to appear in almost the same way as traditional solvent based sealers. Unlike the latter, this product does not cause yellowing over time, preventing excessively dark or unnatural changes in the colour of the wood. This distinctive characteristic of FLAME has been achieved without penalizing other very important qualities such as resistance to the formation of overlapping, considerable coverage, ease of application and sanding. Thanks to its high level of solid content, FLAME in combination with the two component finishes in the INNOVATION range, allows a two coat cycle to be carried out.

### QUICK FACTS

High toning power	
High build property	
Good sanding qualities	
Low emission	
Minimum overlapping	
Ideal for 2 coat cycles	

### TECHNICAL NOTES

Catalysis ratio (vol/vol)	5:1
Dry for sanding (hours)	16
Overcoating without sanding (hours)	After 3, within 8

# One

Single component waterborne,  
sandable and fast drying sealer.



ONE is the latest generation of single component sandable waterborne sealer. Featuring a sophisticated internal self cross-linking system (S-XL Self Cross-Linking System), thanks to its particular three-dimensional structure and the exceptional high build, ONE guarantees appreciable high build power on any type of wood comparable with that of a two-component sealer. The high “open time” and the fast hardening time mean that, whatever the environmental conditions, ONE has a minimum tendency to leave lap marks and/or roller marks. The considerable penetration in the pores of the wood, the good tone and perfect sandability in less than an hour after application, make ONE the best ally for the modern wood floor installer. In line with the quality standards that have always characterized Vermeister, for ONE the R&D laboratory has carefully selected raw materials with very Low emission levels and with low olfactory impact making it practically odour-free.

### QUICK FACTS

Fast and perfect sandability in 1 hour	
No lap marks or roller marks	
Odour-free and low emission level	
Exceptional high build and insulation qualities	
Suitable for 2-coat cycles	

### TECHNICAL NOTES

Dry for sanding (hours)	1
-------------------------	---



## Aqua First

Single component waterborne sealer



Single component waterborne sealer featuring an excellent filling capacity, fast drying time and good shading of the wood.

### QUICK FACTS

Ease of sanding
Fast
Good toning effect

### TECHNICAL NOTES

Dry for sanding (hours)	2
Overcoating without sanding (hours)	within 2 (dry to the touch)

## Aqua Tenax

Two component waterborne sealer



Two component waterborne sealer featuring a high level insulating capacity, excellent coverage, good sandability and ease of application. The most important feature of this sealer is that it minimizes problems of overlapping. AQUA TENAX has been formulated to give a pleasant shade to the wood without causing unwanted changes to the colour of those woods rich in tannin and other water soluble staining substances (oak, teak...). For this reason, it is recommended especially for difficult woods such as IPE LAPACHO when browning or reddening would be undesirable. Thanks to its high level of solid content, AQUA TENAX can be used in combination with the two component finishes in the INNOVATION range, to carry out two coat finishing cycles.

### QUICK FACTS

Low environmental impact certified EC1
High build property
Good sandability
Low emission
Minimizes overlapping
Ideal for 2 coat cycles

### TECHNICAL NOTES

Catalysis ratio (vol/vol)	5:1
Dry for sanding (hours)	12
Overcoating without sanding (hours)	After 3, within 6

## Aqua Play 1

Single component waterborne finish



Single component waterborne finish featuring considerable ease of application and an excellent flow resulting in floors with an impeccable appearance. Thanks to the S-XL technology, AQUAPLAY 1 has a good resistance to abrasion, scratching, scuff marks as well as a chemical resistance equal to two component systems. If it is also used as a sealer, it confers a particularly warm tone to the wood.

### QUICK FACTS

Great ease of application
Good mechanical and chemical resistance
Toning effect (if applied directly on the wood)

### TECHNICAL NOTES

Dry for sanding (hours)	4
Overcoating without sanding (hours)	After 1, within 3
Degree of gloss AQUA PLAY 1 X-MATT (gloss)	10
Degree of gloss AQUA PLAY 1 30 (gloss)	30
Degree of gloss AQUA PLAY 1 60 (gloss)	60
Degree of gloss AQUA PLAY 1 90 (gloss)	90

## Aqua Play 2

Two component waterborne finish



Two component waterborne finish featuring considerable ease of application with excellent flow resulting in floors with an impeccable appearance. The excellent mechanical resistance (to abrasion, scratching and scuff marks) and chemical resistance enable the product to be used in all those situations requiring a high quality finish. If it is also used as a sealer, it confers a particularly warm tone to the wood.

### QUICK FACTS

Considerable ease of application
Excellent flow
Excellent mechanical and chemical resistance
Toning effect (if applied directly on the wood)

### TECHNICAL NOTES

Catalysis ratio (vol/vol)	10:1
Dry for sanding (hours)	16
Overcoating without sanding (hours)	After 3, within 5
Degree of gloss AQUA PLAY 2 X-MATT (gloss)	10
Degree of gloss AQUA PLAY 2 30 (gloss)	30
Degree of gloss AQUA PLAY 2 60 (gloss)	60



## Up-Grade

Shader for waterborne systems



Vermeister UP-GRADE is a special pre-dosed shader that can be added to any Vermeister waterborne products, sealer or top coat, single or two component, to lighten or darken the original color of the wood, eliminating unpleasant colour changes. Especially for oak and, in general, for all light coloured woods, UP-GRADE in its white version tends to neutralise yellowing and excess shading due to water soluble extractives naturally present in the wood. Each coat increases the toning effect and it is advisable to carry out a preliminary test to verify the final look. Available in the following shades: WHITE, GREY, BLACK, AMBER.

### QUICK FACTS

Enhance the naturalness of the wood
Neutralize yellowing and eliminate undesired changes of colour
Regulate the intensity according to the number of coats applied
Versatile and suitable for all waterborne products (sealers and/or finishes)
Easy to use
Low environmental impact

### TECHNICAL NOTES

Quantity per can of sealer or finish* (ml) *1 bottle for every 5 litre can	50
Stability and storage (in original, unopened containers stored in a cool, dry place) (months)	12
Standard packaging (Lt)	0,05

## Dom

Single component waterborne finish for household use



Single component waterborne finish for household use. DOM features considerable ease of application and excellent levelling properties which make it easy to spread. DOM has good resistance to abrasion, scratching and scuff marks and excellent chemical resistance, characteristics which make it the most competitive choice.

### QUICK FACTS

Considerable ease of application
Excellent chemical resistance
Excellent quality/price ratio

### TECHNICAL NOTES

Dry for sanding (hours)	4
Overcoating without sanding (hours)	After 1, within 3
Degree of gloss DOM X-MATT (gloss)	10
Degree of gloss DOM 30 (gloss)	30
Degree of gloos DOM 60 (gloss)	60

## Sanit-Action Finish

Two-component water-based finish for wood floors with sanitizing action.



Polyurethane two-component water-based finish, formulated with the latest generation of nanoparticle additives which, in direct contact with water, release positively charged ions generating a lasting and impenetrable sanitizing barrier on the wood floor. As the result of a constant and controlled release of cations, SANIT-ACTION FINISH performs a long-lasting protective action against germs and bacteria, it complies with the standard according to ISO 22196:2011 and is recommended in all those places where enduring protection is required against bacterial agents. Added to these characteristics, SANIT-ACTION FINISH also offers unmatched qualities of resistance to abrasion, rubber marks and chemical agents making it an ideal product for environments with heavy traffic (hair salons, shops, public areas, etc.).

### QUICK FACTS


Lasting and impenetrable sanitizing barrier
Enduring protection against germs, bacteria and viruses
Extraordinary chemical and mechanical resistance
Ideal product for environments with heavy traffic

### TECHNICAL NOTES

Catalysis ratio (vol/vol)	10:1
Dry for sanding (hours)	12/16
Overcoating without sanding (hours)	After 3 or within 5
Degree of gloss (gloss)	10
Degree of gloss (gloss)	30
Degree of gloss (gloss)	60





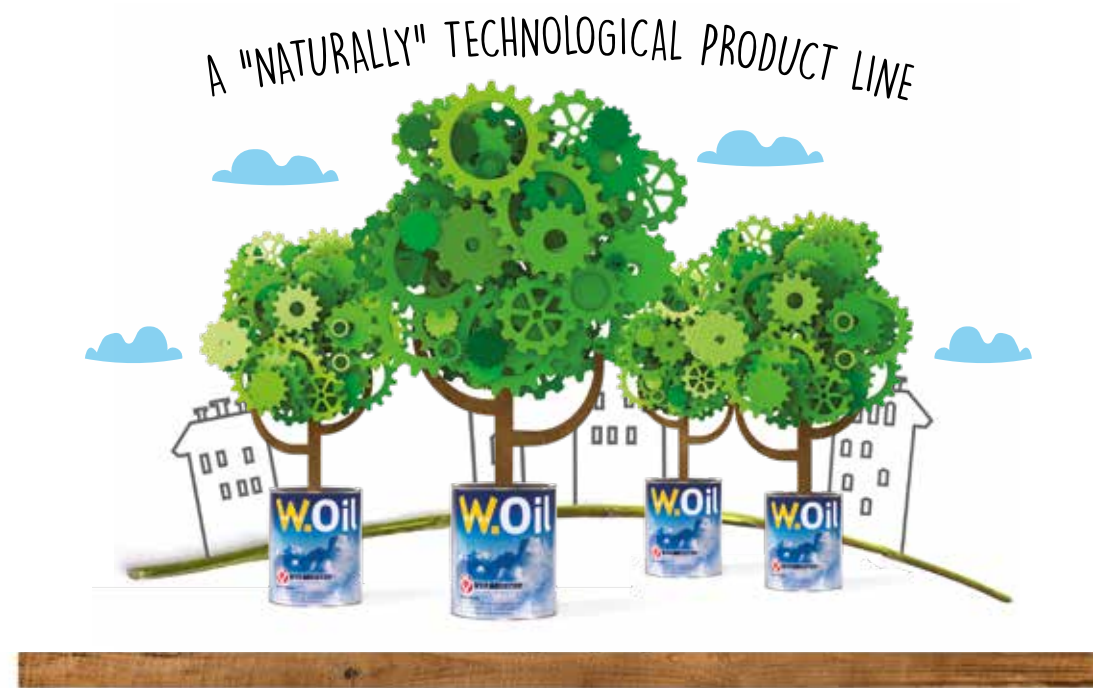


## W.OIL

How to combine the charm of tradition with the requirements of our times, how to offer the working methods of times past without forgoing the performance of modern-day technology.

The solution to this challenge began by seeking out traditional work methods, in which the finishing products based on vegetable oils played a key role.

**Today the W.OIL range offers a modern version of these treatments.**

Starting from natural raw materials and selecting each single component of the formulas, bearing in mind the impact on the environment and on man, today we are able to offer a range of highly effective products.

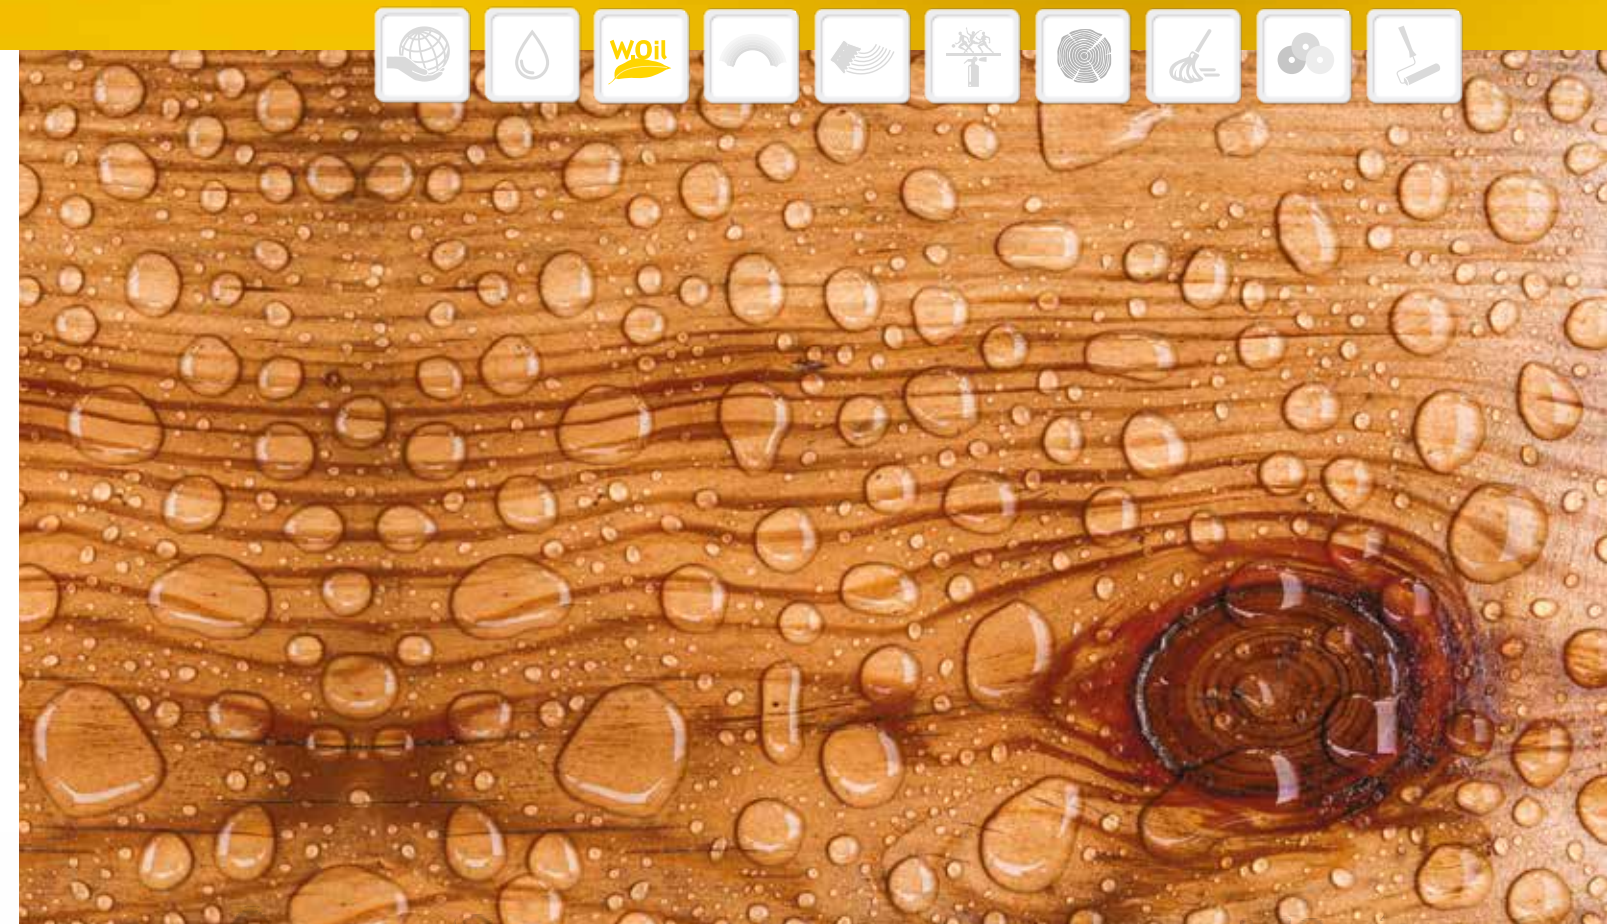

The natural oils applied in the past allow us to bring out all the charm of the wood while the Vermeister technology does all the rest: **the W.OIL products penetrate into the wood, preserving and making it water repellent while quickly restoring all its qualities.** The W.OIL range is easy to use, easy to clean and is also suitable for application in plants producing pre-oiled wood floors.





## Pro.Oil

Protective base coat oil



COBALT  
AND  
KETOXIMES  
FREE

Product based on vegetable oils formulated to protect wood floors. It penetrates deep down, bringing out the characteristic smoothness and warmth of wood, while highlighting the grain. Available in the neutral version (Pro.Oil) and coloured version (Pro.Oil Color– see the Vermeister colour chart).

TECHNICAL NOTES	
Application method	Roller, Brush, Pad
Average coverage per coat (g/m²)	30/50
Max. interval before polishing (min.)	5/15

## Fix.Oil

Highly resistant finishing oil



COBALT  
AND  
KETOXIMES  
FREE

Finishing treatment based on natural oils and waxes for wood floors. Applied after the protective primer Pro.Oil or Pro.Oil Color it protects the wood from water and other substances in daily use (coffee, alcohol...), preventing permanent staining. Use of Fix.Oil increases the resistance to abrasion of oiled floors.

TECHNICAL NOTES	
Application method	Roller, Brush, Pad
Average coverage per coat (g/m²)	30/50
Max. interval before polishing (min.)	5/15

## Clean.Oil

Detergent for oil treated wood floors  
(additional maintenance)



A strong detergent designed specifically for a thorough cleaning of wood floors treated with oils from the W.Oil range. It is also ideal for removing old layers of maintenance products (soaps, waxes, etc.). The perfect balance of components ensures in-depth cleaning without attacking or damaging the wood fibres which, having been treated with natural oils, require particular care and attention.

TECHNICAL NOTES	
Dilution in water for additional cleaning	2-3% (approx. 1 capful for every 2 litres of water)
Application method	Cotton cloth, Vermeister Mop

## Soap.Oil

Soap for oil treated wood floors  
(routine maintenance)



A natural, nourishing detergent for cleaning and maintaining wood floors with oils from the W.Oil range. This product is based on real coconut soap, the most sought-after natural detergent. It cleans and nourishes the wood fibres giving the floor a particularly uniform and matt appearance. Do not use on coated floors.

TECHNICAL NOTES	
Dilution in water for routine cleaning	5% (approx. 1 capful for every litre of water)
Application method	Cotton cloth, Vermeister Mop
Recommended frequency of use	Once-twice a week (indoors) Once every 1-2 months (outdoors)



## Color.Oil

Oil wood stain



1 Lt

COBALT  
AND  
KETOXIMES  
FREE

Stain based on modified vegetable oils designed to colour indoor wood floors. Easy to use, it stains wood floors evenly. Suitable for all types of wood, although it produces the best results and is recommended for this use on large grain woods such as oak, larch, chestnut, etc. COLOR.OIL can be overcoated with FIX.OIL, waterborne finishes or oil modified finishes. Available in various shades that can be blended together in any proportion, making the range of colours practically limitless.

### QUICK FACTS

Easy to use
Available in various shades that can be blended together
Possibility of invisible touch ups
Low odour
No hazard symbols

### TECHNICAL NOTES

Application method	Roller, Brush, Pad
Average coverage per coat (g/m <sup>2</sup> )	30/50
Interval before polishing (min.)	5/10
Interval before coating with fixative without sanding (hours)	Minimum 16

## Ceradura Hardwax-oil

Oil-wax for treating wood floors



3 Lt

COBALT  
AND  
KETOXIMES  
FREE

The natural CERADURA Hardwax-oil treatment is a balanced blend of oils and hard waxes that provides wood floors with an effective and long-lasting protection against scratches and staining. One of the most outstanding features of this particular product is the “spot retouch” characteristic that allows localized repairs to be carried out without having to undertake demanding sanding work over the whole surface. Thanks to its in-depth penetration and fast drying time, CERADURA Hardwax-oil provides the wood with a high level of protection, guaranteeing a surface that remains resistant to dirt for a long time without altering the vital natural transpiration properties of the wood. Unlike the usual oiled floors, the surfaces treated with CERADURA Hardwax-oil are easy to clean and maintain. CERADURA Hardwax-oil guarantees a high standard of comfort living and contributes to daily well-being combining the value of the look with the natural qualities of the raw materials.

### QUICK FACTS

Easy to use
Fast: 1 or 2 coats (6/8 hours between the 2 coats)
Invisible retouch
Low odour
No hazard symbols
Highly resistant to scratches and chemical agents

### TECHNICAL NOTES

Application method	Roller, Brush, Pad
Average coverage per coat (g/m <sup>2</sup> )	30/50
Max. interval before polishing (min.) (optional)	5/10
Overcoating (hours)	6/8
Degree of gloss (gloss)	10

## Ceradura Hardwax-color

Pigmented oil-wax for wood floors



1 Lt

COBALT  
AND  
KETOXIMES  
FREE

CERADURA HARDWAX-COLOR is a pigmented blend of natural oils and waxes to stain wood floors. Easy to use, it stains the floor evenly in just one coat, highlighting the grain of the wood and for this reason, although it is suitable for all species of wood, it is recommended for use especially on wide grain woods such as oak, larch, chestnut, etc.. CERADURA HARDWAX-COLOR can be applied with a roller for an opaque effect or with a ragging technique for a pickled finish and always requires a protective coat of CERADURA HARDWAX-OIL. Available in various shades that can be mixed together in any proportion to achieve a practically infinite range of colours (see the Vermeister colour chart). The low level odour and the absence of any hazardous additives such as cobalt and ketoxime guarantee that floors treated with CERADURA HARDWAX-COLOR offer a high level of home comfort.

### QUICK FACTS

Easy to use
Suitable also for “wood cover effect”
Invisible retouch
Low odour
No hazard symbols
Available in a wide range of colours

### TECHNICAL NOTES

Application method	Roller, Brush, Pad
Average coverage per coat (g/m <sup>2</sup> )	30/50
Max. interval before polishing (min.) (not for “wood cover effect”)	5/10
Overcoating (hours)	6/8

## Life.Oil

Maintenance oil for oil treated wood floors (additional maintenance)



1 Lt

Maintenance oil for use on wood floors treated with FIX.OIL. Formulated with natural oils and waxes, it protects the wood and is used to restore worn floors to their original appearance.

### TECHNICAL NOTES

Application method	Pad
Average coverage per coat (g/m <sup>2</sup> )	30/50
Interval before polishing (min.)	10/20
Ready for traffic (hours)	2/4



## Deck.Oil

Protective oil for outdoor use



A vegetable based protective oil consisting of a balanced blend of various oils (linen, wood, etc.) formulated specifically for outdoor use. DECK.OIL brings out the features of softness and warmth while enhancing the grain of the wood.

TECHNICAL NOTES	
Application method	Roller, Brush, Pad
Average coverage per coat (g/m²)	50/80
Interval before polishing (min.)	5/10

## Deck.Oil Strong

High performance protective oil for outdoor use



A vegetable based high performance protective oil consisting of a balanced blend of various oils (linen, wood, etc.) formulated specifically for outdoor use. DECK.OIL Strong brings out the features of softness and warmth while enhancing the grain of the wood.

TECHNICAL NOTES	
Application method	Roller, Brush, Pad
Average coverage per coat (g/m²)	40/100
Interval before polishing (min.)	5/10

## Deck.Oil GS

Very high performance protective oil for outdoor use



Transparent vegetable based protective oil offering a very high performance, DECK.OIL GS is the result of a very careful selection of various natural oils and waxes that have been perfectly balanced and studied for outdoor application. DECK.OIL GS, protects the wood from atmospheric agents and, in particular, from sun rays, while leaving its natural breathability unaltered. The deep penetration into the wood, the ease of application and restoration without requiring intermediate sanding, the exceptional resistance to water and to UV rays all make DECK.OIL GS the ideal product for treating any wooden item for outdoor use.

TECHNICAL NOTES	
Application method	Roller, Brush, Pad
Average coverage per coat (g/m²)	40/100
Interval before polishing (min.)	5/10

## Deck.Oil GS Color

Very high performance protective pigmented oil for outdoor use



Pigmented vegetable based protective oil offering a very high performance, DECK.OIL GS COLOR is the result of a very careful selection of various natural oils and waxes that have been perfectly balanced and studied for outdoor application. DECK.OIL GS COLOR protects the wood from atmospheric agents and, in particular, from sun rays, while leaving its natural breathability unaltered. The deep penetration into the wood, the ease of application and restoration without requiring intermediate sanding, the exceptional resistance to water and to UV rays all make DECK.OIL GS the ideal product for treating any wooden item for outdoor use. It is always advisable to apply a coat of protective DECK.OIL GS in the neutral version on top. Available in 20 colours (see the Vermeister colour chart).

TECHNICAL NOTES	
Application method	Roller, Brush, Pad
Average coverage per coat (g/m²)	40/100
Interval before polishing (min.)	5/10



## Oil.Care

Maintenance product for oil treated  
indoor and outdoor floors  
(routine maintenance)

1 Lt



OIL.CARE is an emulsion of waxes, natural oils, modified oils and special anti UV additives for the maintenance of outdoor floors treated with DECK.OIL, DECK.OIL STRONG, DECK.OIL GS, ZERO.DECK or indoor floors treated with the W.OIL range. Cobalt and Methyl Ethyl Ketoxime-free. The oil component of OIL.CARE restores the treatment oil that has deteriorated due to exposure to atmospheric agents and it penetrates into the wood providing in-depth protection, the water repellent wax prevents water from entering the pores in the wood, while the anti-UV additives delay the deterioration of the lignin. OIL.CARE is also suitable for protecting indoor oil treated wood floors and all wood products treated with impregnation products, both indoors and out (garden furniture, wooden partitions, beams, fences...). Recommended particularly as a protective treatment for WPC.

### TECHNICAL NOTES

Application method	Roller, Brush, Pad, Beige Pad
Dilution in water	20/25%
Recommended frequency of use	once every 1-2 months
Ready for traffic (min.)	30
Ready for traffic and for max. performance (hours)	12

## Deck.Reset

Pre-treatment for outdoor wood floors  
and manufactured products

5 Lt




1 Lt

A highly effective watery solution for removing the grey patina on outdoor decking and wood products caused by the deterioration and washing away of the lignin. Use of DECK. RESET restores the original colour of the wood that is then protected with DECK.OIL, DECK.OIL STRONG, DECK.OIL GS and ZERO.DECK. DECK. RESET can be used on flooring, garden furniture, wooden gazebos and on all wood items located outdoors. It is recommended especially as a strong detergent for WPC.

### TECHNICAL NOTES

Application method	Spray, Roller, Brush, Pad
Average coverage per coat (g/m <sup>2</sup> )	50 with spray or pad, 80 with roller or brush
Operating time for using trowels, brushes, pads (min.)	10
Operating time for using a pressure washer (min.)	From 10 to 20

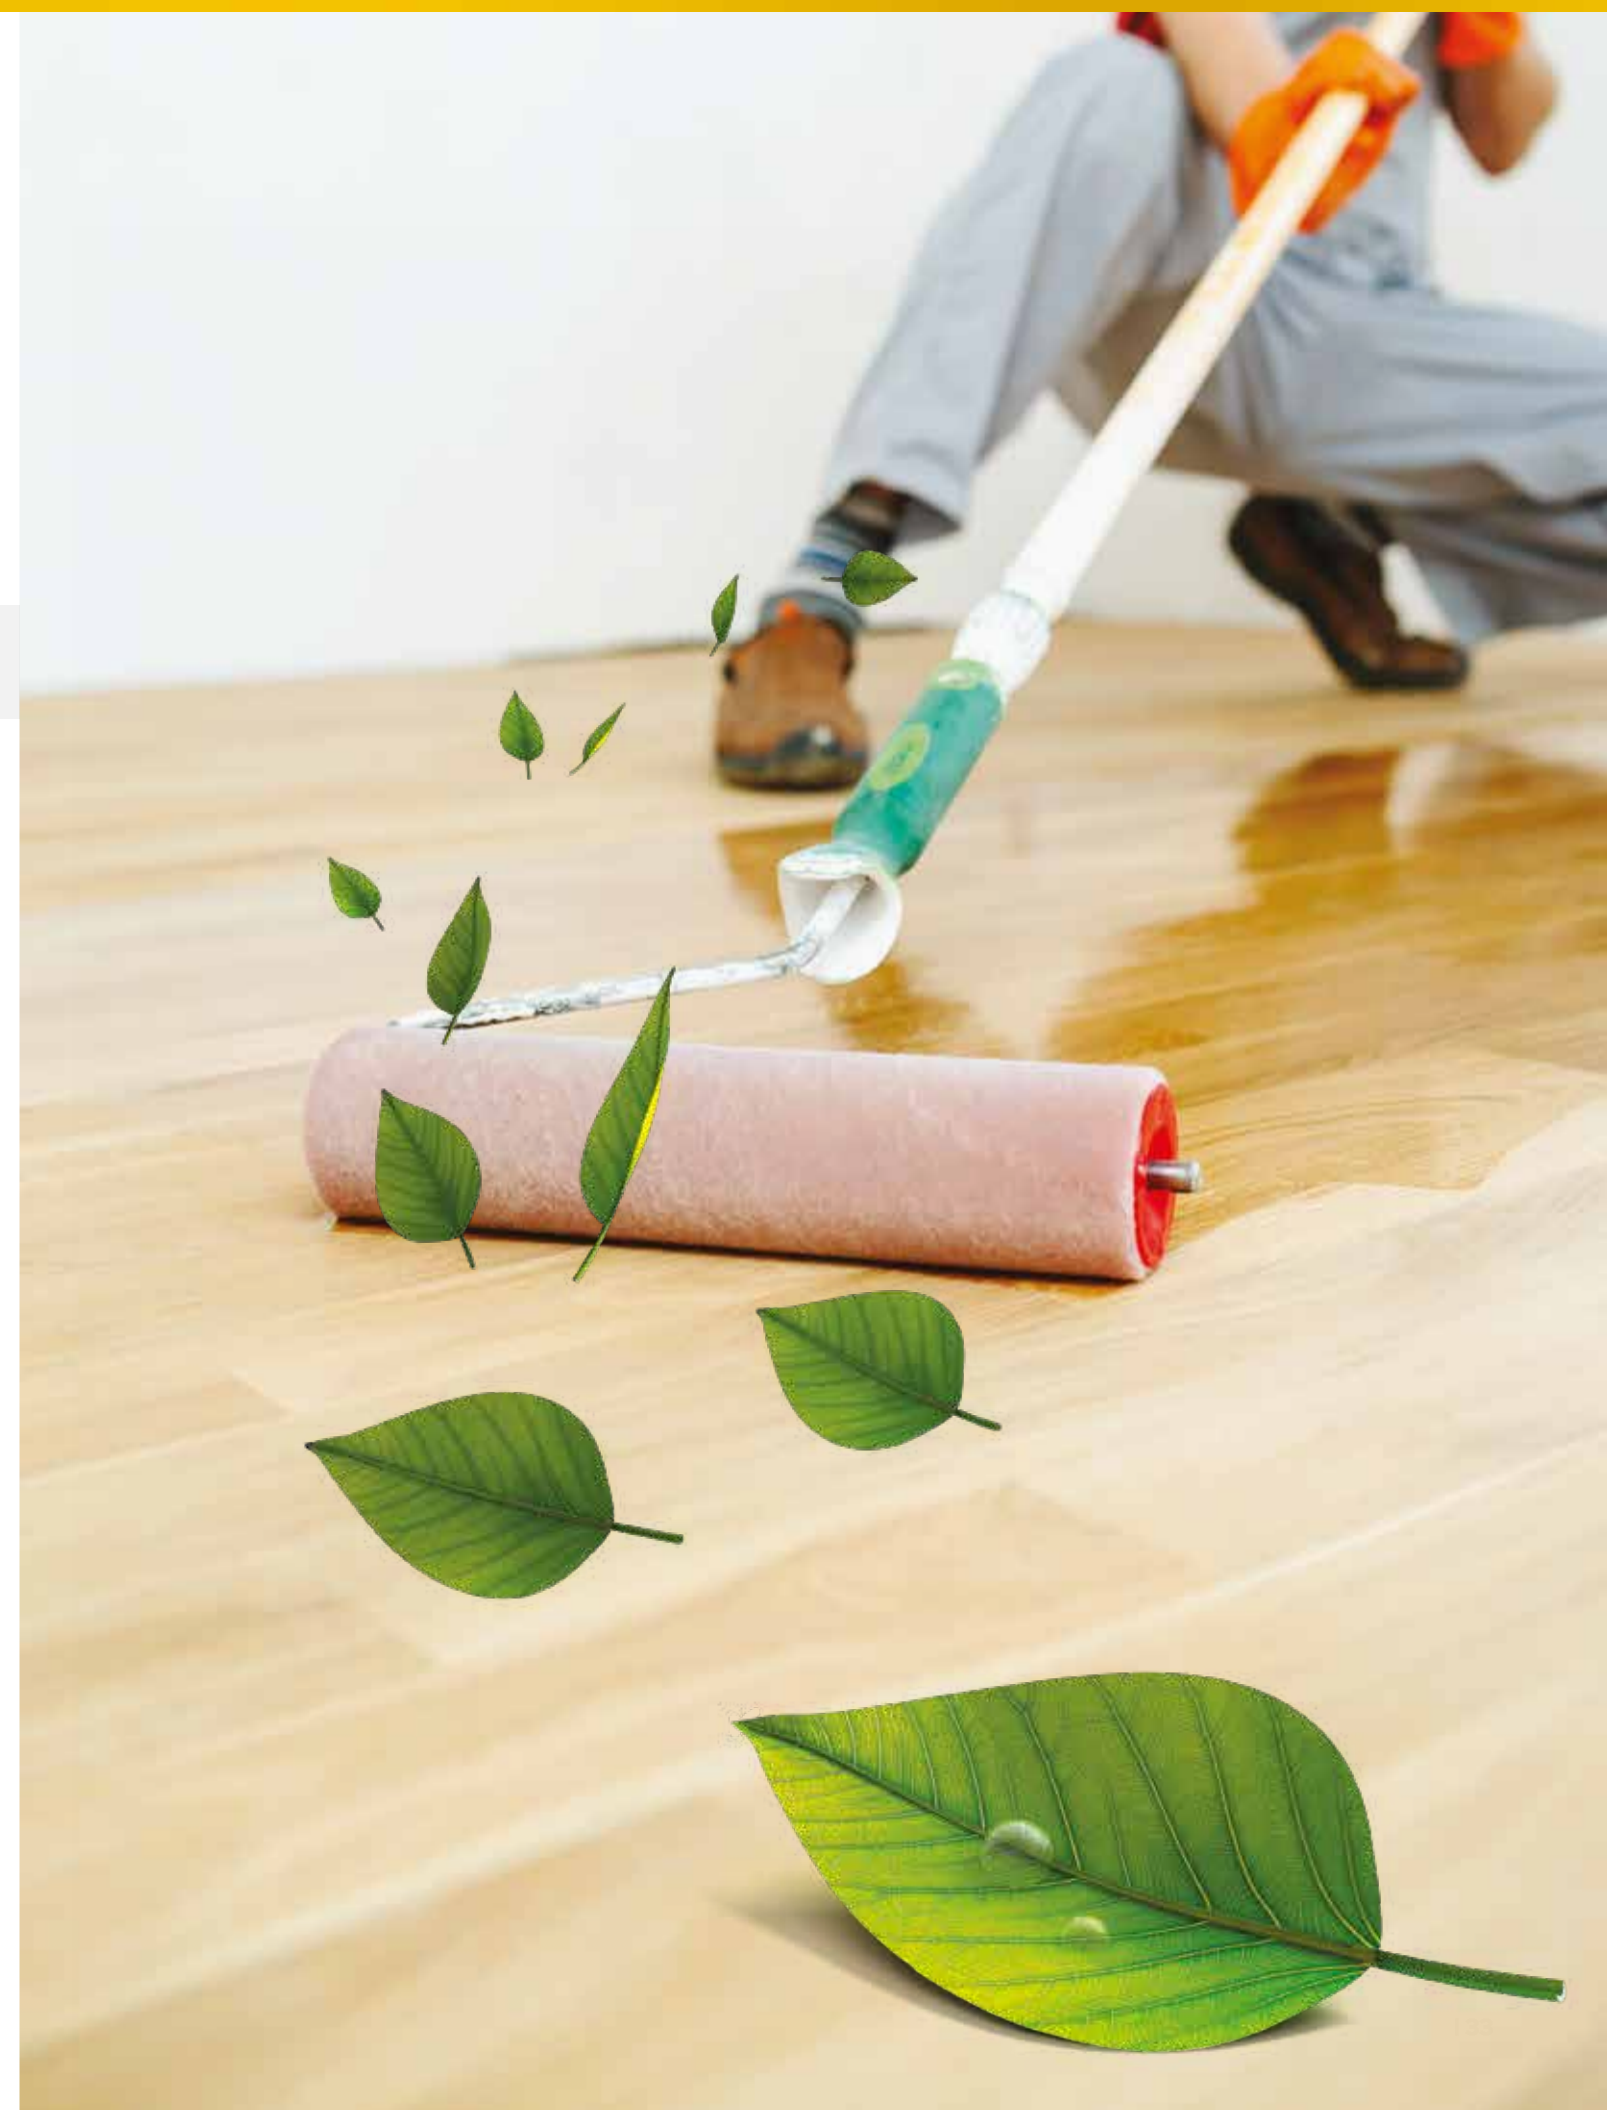





## CHROMOTHERAPY

In the past, wood flooring was nearly always finished with colourless, transparent finishes and, consequently the choice of wood species was decisive for the chromatic effect of the finished flooring. However, over recent years, we have witnessed important changes linked to the difficulty of obtaining raw materials, or more precisely a variety of different wood species capable of offering a wide range of colours.

**Loyal to our commitment to assist wood floor installers with up-to-date technical solutions, we decided to boost our offer of products for staining wood floors.**

**The main features of these systems are their ease of use, the certainty of the final appearance and the low environmental impact, while providing the extraordinary physical and chemical performance typical of Vermeister products.**

With Chromotherapy, customers can choose from a light shade effect, a wood cover effect or for more traditional tastes, a deep-down stain effect to enhance the wood grain. The Chromotherapy colouring systems renew the look of wood flooring and also offer a variety of different protective treatments ranging from oil to waterborne products according to preference. Now with Chromotherapy it is at last possible to choose the colour and finish of the floor with absolute assurance. The Chromotherapy colouring systems are the result of a specific commitment towards research and advanced technology and as such are also highly recommended for treatments prior to installation.

**Completely safe both for those applying the product and for the end user, none of the products in the Vermeister Chromotherapy range bears hazard labels as they are non-inflammable, non-hazardous, practically odour-free and free of harmful post-application emissions.**





## Artwork

Enamel – wood cover effect  
Two component waterborne  
pigmented treatment



Two component waterborne pigmented treatment featuring top rate coverage, ease of application and excellent leveling. ARTWORK offers a considerable insulating capacity of the tannins and other wood extracts and for this reason, it enables lighter shades to be achieved even on critical woods such as chestnut and oak. With ARTWORK wood floors and wood surfaces can be given any colour: in fact ARTWORK is available, on request, in all RAL shades.



White

Black

Grey

RAL  
Colour

### QUICK FACTS

Excellent coverage

Easy to use

Great tannin insulating capacity

Available on request in all RAL shades

### TECHNICAL NOTES

Catalysis ratio (vol/vol)	10:1
Dust dry (min.)	25
Impression dry (min.)	40
Completely dry (hours)	12
Overcoating (hours)	after 3, within 5
Application method	Roller, brush

## Deck.Oil GS Color

Very high performance protective  
pigmented oil for outdoor use



Pigmented vegetable based protective oil offering a very high performance, DECK.OIL GS COLOR is the result of a very careful selection of various natural oils and waxes that have been perfectly balanced and studied for outdoor application. DECK.OIL GS COLOR protects the wood from atmospheric agents and, in particular, from sun rays, while leaving its natural breathability unaltered. The deep penetration into the wood, the ease of application and restoration without requiring intermediate sanding, the exceptional resistance to water and to UV rays all make DECK.OIL GS the ideal product for treating any wooden item for outdoor use. It is always advisable to apply a coat of protective DECK.OIL GS in the neutral version on top. Available in 20 colours (see the Vermeister colour chart).

### TECHNICAL NOTES

Application method	Roller, Brush, Pad
Average coverage per coat (g/m <sup>2</sup> )	40/100
Interval before polishing (min.)	5/10

## Color.Oil

Wood grain highlighting effect  
Oil wood stain



Stain based on modified vegetable oils designed to colour indoor wood floors. Easy to use, it stains wood floors evenly. Suitable for all types of wood, although it produces the best results and is recommended for this use on large grain woods such as oak, larch, chestnut, etc. Color.Oil can be overcoated with Fix.Oil, waterborne finishes or oil modified finishes. Available in various shades that can be blended together in any proportion, making the range of colours practically limitless.

### QUICK FACTS

Easy to use

Available in various shades that can be blended together

Possibility of invisible touch ups

Low odour

No hazard symbols

### TECHNICAL NOTES

Application method	Roller, Brush, Pad
Average coverage per coat (g/m <sup>2</sup> )	30/50
Interval before polishing (min.)	5/10
Interval before coating with fixative without sanding (hours)	Minimum 16

## Ceradura Hardwax-color

Pigmented oil-wax for wood floors



Ceradura Hardwax-color is a pigmented blend of natural oils and waxes to stain wood floors. Easy to use, it stains the floor evenly in just one coat, highlighting the grain of the wood and for this reason, although it is suitable for all species of wood, it is recommended for use especially on wide grain woods such as oak, larch, chestnut, etc.. Ceradura Hardwax-color can be applied with a roller for an opaque effect or with a ragging technique for a pickled finish and always requires a protective coat of Ceradura Hardwax-oil. Available in various shades that can be mixed together in any proportion to achieve a practically infinite range of colours (see the Vermeister colour chart). The low level odour and the absence of any hazardous additives such as cobalt and ketoxime guarantee that floors treated with Ceradura Hardwax-color offer a high level of home comfort.

### QUICK FACTS

Easy to use

Suitable also for “wood cover effect”

Invisible retouch

Low odour

No hazard symbols

Available in a wide range of colours

### TECHNICAL NOTES


Application method	Roller, Brush, Pad
Average coverage per coat (g/m <sup>2</sup> )	30/50
Max. interval before polishing (min.) (not for “wood cover effect”)	5/10
Overcoating (hours)	6/8






## READY TO GO | Ready-to-use coloured bases

PRO.OIL Protective base coat oil - COLOR.OIL Oil wood stain - DECK.OIL GS Very high performance protective oil for outdoor use  
CERADURA HARDWAX-COLOR Pigmented oil-Wax for treating wood floors




Amber




Antiqua



White




Chestnut




Cherry




Grey Dolphin



Grey




Havana




Natura



Black



Antique Walnut




Light Walnut




Oceana




Platinum




Antique Oak




Smokey



Stone



Supernatural



Teak




Wengè




## DO IT YOURSELF | Find the most suitable colour for your needs


PRO.OIL Protective base coat oil - COLOR.OIL Oil wood stain - DECK.OIL GS Very high performance protective oil for outdoor use  
CERADURA HARDWAX-COLOR Pigmented oil-Wax for treating wood floors




3 Cherry + 1 White



4 Havana + 1 Oceana  
+ 1 Wengè




3 Cherry + 1 White  
+ 1 Light Walnut



4 Antique Walnut + 1 White




2 Havana + 1 White



1 Havana + 1 Amber




1 Havana + 1 Antiqua




3 Havana + 1 White  
+ 1 Cherry



1 Supernatural + 1 Havana




3 Natura + 1 Black




1 Chestnut + 1 Supernatural  
+ 1 Natura




1 Grey + 1 Smokey



1 Havana + 1 Wengè



2 Amber + 2 Chestnut  
+ 1 Natura




1 Havana + 1 Chestnut




3 Oceana + 1 Black



3 Platinum + 1 Natura



4 Havana + 1 Wengè



6 Natura + 1 Black



3 Light Walnut + 1 White

ATTENTION: FOR THE FINISH OF THE ABOVE-MENTIONED PRODUCTS, PLEASE REFER TO THE RELEVANT TECHNICAL DATA SHEETS! The Vermeister Chromotherapy system is based on very high quality pigments that confer an extremely natural, UV stable shade to the wood.

NOTE: The images are given as a guideline only, the printed colours may vary slightly to the actual colours and to the final results of the work which are influenced by the type of wood and the sanding operations. We always suggest preparing a preliminary sample on the type of wood to be used.






## UNDERWOOD

Range of products for laying wood floors.

The correct laying of a wood flooring begins with the preparation of the floor screed. **Particular attention must be paid to some factors such as the compactness, flatness, thickness, cleanliness and above all the moisture content.**

The Underwood range of products offers everything necessary for what lies “under” the wood flooring in order to deal with and solve any fitting needs or preliminary treatments with absolute peace of mind.

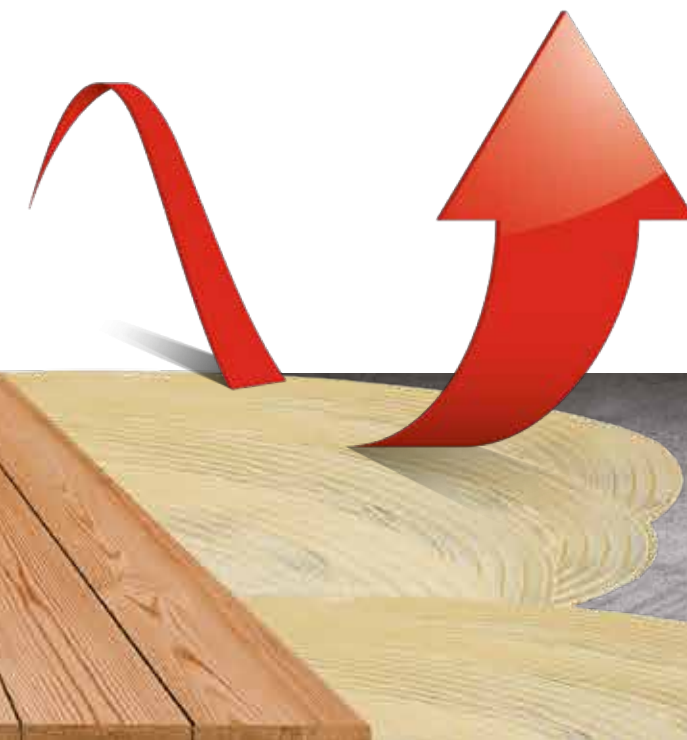



Primer SF

Single component polyurethane solvent-free primer



Single component polyurethane moisture-cure primer that is water and solvent-free for treating subfloors before laying wood floors. The low level viscosity and the excellent penetration make it ideal for strengthening and waterproofing concrete and anhydrite screeds with a high level of moisture up to a maximum of 5% M.C. (up to 2.8% M.C. with just one coat). It is recommended especially for screeds with built-in heating. Moreover, the absence of solvents makes it safe for transportation and storage (non flammable product) and when applied (odourless, it can also be used in the vicinity of rooms that are in use). Compared with products containing water, PRIMER SF offers a much higher coverage and does not increase the humidity of the screed.

QUICK FACTS	
Low environmental impact certified EC1	
Solvent-free	
Very high resistance to humidity (≤ 5% M.C.)	
Performance certified by an external independent authority	
Low level viscosity for deeper penetration	
Absence of oiliness on the surface for a perfect adhesion of the adhesive	

TECHNICAL NOTES	
Completely dry (hours)	24
Average coverage per coat (g/m²)	150/250
Calculated VOC (g/ltr)	0

Primer UR 50

Single component polyurethane primer



Single component polyurethane moisture-cure MDI-free primer for treating subfloors. The main characteristic of this product is its versatility. In fact it can be used to restore uneven concrete subfloors, to treat crumbly screeds, to accelerate laying times in the case of subfloors with a high level of residual humidity (up to a maximum of 5% M.C.) and as a binder for the preparation of synthetic mortars for fast repairs.

QUICK FACTS	
MDI-free	
Extremely versatile	
Very high resistance to humidity (≤ 5% M.C.)	

TECHNICAL NOTES	
Completely dry (hours)	24
Average coverage per coat (g/m²)	150/250

Primer EPO 2

Two component epoxy primer



Two component water and solvent-free epoxy primer for treating subfloors. It can be used to treat crumbly screeds or screeds with a high level of residual humidity up to a maximum of 5% M.C., as well as being suitable as a binder for the preparation of synthetic mortar for quick repairs.

QUICK FACTS	
Very high resistance to humidity (≤ 5% M.C.)	
Solvent-free	
Ideal for rooms with little ventilation and/or those in use	

TECHNICAL NOTES	
Catalysis ratio (vol/vol)	2:1
Pot Life at a room temperature of 10°C (min.)	35
Pot Life at a room temperature of 20°C (min.)	28
Pot Life at a room temperature of 30°C (min.)	15
Overcoating (hours)	5-16
Completely dry (hours)	24/48
Average coverage per coat (g/m²)	150/250

Primer EPO 3

Three component epoxy primer



Three component waterborne epoxy primer for damp-proofing concrete subfloors and old pre-existing floors (ceramic tiles, stoneware, marble, etc.).

QUICK FACTS	
Suitable for non-absorbing surfaces	

TECHNICAL NOTES	
Catalysis ratio (vol/vol)	2:1:2
Duration of the mixture (hours)	1
Overcoating (hours)	4-12
Average coverage per coat (g/m²)	400/500



## Acrylic primer in a watery solution



## QUICK FACTS

Eliminates dust

Ideal for rooms with little ventilation and/or those in use

Adhesion improver for smoothing cement

## TECHNICAL NOTES

100/250

## Silicate based primer



Solvent-free

High level penetration

High strengthening power

## TECHNICAL NOTES

500-1500



## QUICK FACTS

Excellent antidust action

Quick drying

Suitable for subsequent gluing with single or two component reactive adhesives

## TECHNICAL NOTES

Roller, brush

100/200

## Adhesion improver



Lt

## QUICK FACTS

Suitable for diluting Vermeister epoxy polyurethane adhesives

Suitable for diluting Primer EPO 2

It improves adhesion to more difficult surfaces quite considerably.

## TECHNICAL NOTES

30/50



25 Kg

RASOSELF

VERMEISTER

SOLUTIONS FOR WOOD FLOORS

### Rasoself

Pre-mixed self-levelling,  
reinforced cement

Pre-mixed, self-levelling, fibre-reinforced cement that sets quickly for smoothing uneven horizontal subfloors and for laying wood floors, carpet, rubber, PVC, ceramic tiles and natural stone quickly. It can be used to create thicknesses up to 40 mm in just one coat leading to a considerable saving in time while being simple to use. RASOSELF makes any new or pre-existing concrete screed perfectly flat correcting differences of thickness from 3 to 40 mm in just one coat. RASOSELF can be used in houses, factories as well as in places subject to heavy traffic, both indoors and out, on cement subfloors and poured or ready mixed concrete subfloors.

TECHNICAL NOTES	
Ratio for use (litres of water per bag)	6
Pot-life (min)	30/40
Hardening time (min.)	60
Ready for traffic (hours)	3
Interval before laying (always check the moisture with a carbide hygrometer before laying the floor) (hours)	24
Average coverage (kg/mq-mm of thickness)	1.6

25 Kg

SABBIA DI QUARZO

### Sabbia di quarzo

Fine quartz sand

Quartz sand with a controlled particle size, perfectly washed and dried.

QUICK FACTS
Suitable for the preparation of synthetic mortar
Suitable for sprinkling to improve adhesion

TECHNICAL NOTES	
Particle size (mm)	0,1/0,35

25 Kg

10 Kg

VERMEISTER

SOLUTIONS FOR WOOD FLOORS

### Revin X

Single component vinyl adhesive

Single component adhesive in dispersion with a low water content for gluing wood floors including those of medium sized floorboards with a thickness of 14/17 mm on concrete subfloors with a moisture content of 2% or less or on other absorbing subfloors. The floors glued with REVIN X have excellent bonding, adhesion and permanent elasticity.

QUICK FACTS
Excellent bonding, adhesion and permanent elasticity

TECHNICAL NOTES	
Open time (min.)	10/15
Ready for traffic (hours)	6
Interval before sanding (days) 3	Minimum 18
Average coverage (g/m²)	600/900

10 Kg

### Revin LL

Single component vinyl adhesive

Transparent vinyl adhesive in a watery dispersion suitable for gluing the heads of solid wood flooring without interlocking to reduce “sliding” during the laying phases. Compared with traditional vinyl adhesives, this product offers the undoubted advantage of being completely transparent after drying. It is also recommended as a highly resistant adhesive for gluing wood profiles and all wooden materials in general.

QUICK FACTS
Ideal for gluing the heads of wood floor
Transparent after hardening
High mechanical resistance

TECHNICAL NOTES	
Open time (min.)	8/12



# Repos

Two component epoxy polyurethane adhesive



The latest generation of two component epoxy polyurethane adhesive for gluing wood floors of any size on cement subfloors, even heated ones, and non-absorbing subfloors (ceramic tiles, stoneware, marble, etc.) and ideal for laying solid,engineered and planks wood floors. A real evolution: REPOX asserts itself in a new version with an improved rheology making it easier to spread and leading to a perfect ridge height. REPOX is outstanding for the fact that it is almost insensitive to changes in temperature (seasonality), completely odourless both before and after mixing and offers excellent hold and wettability under any environmental condition. The high coefficient of elasticity after hardening completes the features of the REPOX revolutionary adhesive together with its unbeatable characteristics of adhesion and toughness.

### QUICK FACTS

Solvent content < 2%	
Very good reactivity even at low temperatures	
Insensitive to changes in temperature (seasonality) – constant viscosity	
Considerably reduced odour of component B	
Excellent coverage	
Excellent spreadability	
Perfect ridge height	

### TECHNICAL NOTES

Pot-life (hours)	2
Open time (hours)	1
Ready for traffic (hours)	24/48
Interval before sanding (days) 3	3
Average coverage (g/m²)	900-1400

# Monosil

Single component silane-terminated adhesive



Single component silane-terminated moisture-cure adhesive. MONOSIL does not contain water, solvents, isocyanates, epoxy or amino compounds or heavy metals (tin) and consequently does not bear any health or risk warnings or symbols. MONOSIL has excellent adhesion characteristics on all subfloors as well as permanent elasticity. These characteristics make it the ideal adhesive for laying engineered and traditional solid wood floors of average size on all subfloors, with or without underfloor heating. MONOSIL does not harm the coating of pre-finished wood floors and for this reason does not leave any marks; other features of this adhesive are the ease with which it can be worked, the high level coverage, resistance to water and the capacity to absorb sound leading to a considerable improvement in the comfort of the environment with regard to noise levels. **Being certified EMICODE EC1PLUS, MONOSIL may apply for the awarding of the EQ credit for Indoor Environmental Quality – Low-Emitting Materials of the new international certification standard LEED v4.**

### QUICK FACTS

Low environmental impact certified EC1 PLUS	
No hazard label	
Excellent coverage	
Excellent spreadability	
Perfect ridge height	
High sound absorbing capacity	
Available in a sausage pack version - Monosil 600	

### TECHNICAL NOTES

Open time (max. registration time) (min.)	45-60
Open time (time for the formation of the surface skin) (min.)	120-150
Ready for traffic (hours)	24
Interval before sanding (days) 3	5
Average coverage (g/m²)	800-1000

# Monosil P

Single component silane-terminated adhesive for laying pre-finished multi-layer wood floors



Single component silane-terminated moisture-cure adhesive. MONOSIL P does not contain water, solvents, isocyanates, epoxy or amino compounds or heavy metals (tin) and consequently does not bear any health or risk warnings or symbols. MONOSIL P have been specifically designed for laying pre-finished multi-layer wood floors on all subfloors, with or without underfloor heating. Its special formulation also does not appear to be aggressive therefore MONOSIL P does not harm the coating of pre-finished wood floors and for this reason does not leave any marks. **Being certified EMICODE EC1PLUS, MONOSIL P may apply for the awarding of the EQ credit for Indoor Environmental Quality – Low-Emitting Materials of the new international certification standard LEED v4.**

### QUICK FACTS


No thickness swelling	
Not aggressive on prefinished wood floor coatings	
Easy to clean from floors and hands	
No hazard labelling	
Proven stability over time	
Reliability in compliance with standard UNI EN 14293:200	
Superior coverage	

### TECHNICAL NOTES

Open time (max. registration time) (min.)	45-60
Open time (time for the formation of the surface skin) (min.)	120-150
Ready for traffic (hours)	24
Complete hardening (days)	3
Average coverage (g/m²)	800-1000

# Revin B3

Class D3 single component adhesive



Single component adhesive in a watery dispersion for gluing engineered wood floors and floating laminate floors. When dry, the bonding achieves D3 class resistance to water (according to EN 204).

### QUICK FACTS

Easy to clean	
Resistant to water in class D3 (EN 204)	
Ready to use	

### TECHNICAL NOTES

Open time (min.) 8/12	8/12
-----------------------	------



## Polifoam

Expanding polyurethane resin



Single component expanding polyurethane moisture-cure resin that is SOLVENT-FREE for gluing planks that are not perfectly anchored to the subfloor. The expansion characteristic of the product enables it to penetrate inside all the cavities between the screed and the wood leading to a strong, lasting bond and eliminating any annoying “hollow” sound.

### QUICK FACTS

Strong expansion

Fast hardening

High mechanical resistance

### TECHNICAL NOTES

Open time (min.)	8/12
------------------	------

## Quick stop

Waterborne quick setting adhesive



QUICK STOP is a single component waterborne adhesive for gluing operations requiring an immediate and very firm setting. It is ideal for gluing vertical skirting, beading etc. as long as one of the two surfaces is absorbent. QUICK STOP sets very well on concrete, stone, brickwork, ceramic tiles, wood and polystyrene. QUICK STOP glues with a very strong, long lasting hold. It features a high solid content, excellent thixotropy and strong initial setting.

### QUICK FACTS

Ideal for vertical gluing

Strong initial setting

High mechanical resistance

### TECHNICAL NOTES

Open time (min.)	15/20
Completely hard (hours)	24

## Gap Filler

Coloured acrylic sealer



GAP FILLER is an acrylic sealant in a solvent-free watery dispersion for wood and laminate floors. Available in the colours WHITE, MAPLE, OAK, DOUSSIÉ, MEDIUM WALNUT, DARK WALNUT.



### QUICK FACTS

Very elastic

Suitable for filling expansion joints

Suitable for gluing skirting boards

Can be sanded and overcoated

Removable with water when still wet

### TECHNICAL NOTES

Open time (min.)	10-20
Flexibility	7%
Overcoating (hours)	4-6








## SPORT & FIREFIGHTING

Sports floors like those in public areas must often comply with very specific requirements in terms of finishes and technical performance. Standard EN 14904 is the European reference standard that sets out the technical performance requirements that sports floors must satisfy. Particular attention is also given to the treatment of the wood floors and specifically with regard to: Friction (or the non-slip properties), Resistance to wear, Mirror finish and the Reaction to fire classification. The Vermeister products in the “Sport & Firefighting” range provide the answer to all the standard requirements as well as the various technical needs for this complex type of flooring.

In the case of the need for a reaction to fire, the pre-finished coating must be tested and classified according to the requirements of the standard EN 13501-1 and the resulting class and sub-class must be declared. In those cases in which the floors are coated during work in progress, products must be used that are approved according to the regulations in force, following the relevant procedures.

**The products in the “Sport and Firefighting” range not only satisfy all technical requirements and standards, but they are also simple to use, provide reliable results and are ready to be applied in more demanding conditions and on large surfaces. In other words, both safety and appearance are guaranteed.**

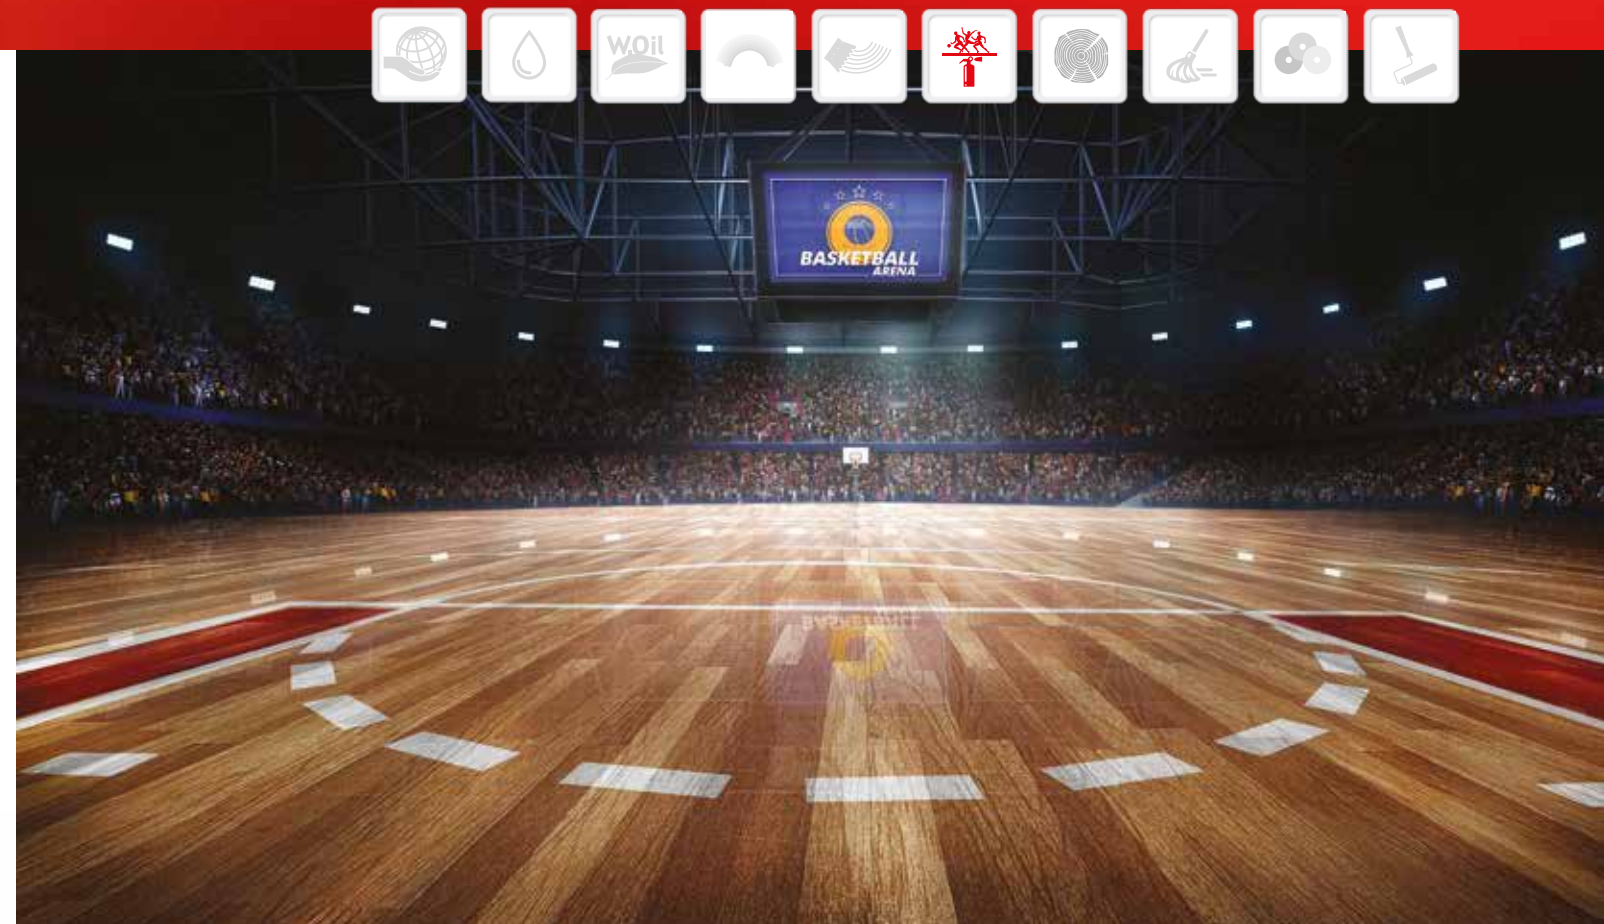

## OFFICIALLY APPROVED BY FIBA

Vermeister’s “Sport & Firefighting” range of water-based products for finishing and maintaining hardwood sports floors **is APPROVED by FIBA (the International Basketball Federation)**, the governing body of basketball worldwide. The range satisfies all the regulatory requirements as well as the technical needs of this complex type of flooring.





## Master Fire

Class 1 fireproof finish

5 Lt  
+  
5 Lt



Two component fireproof finish recommended for treating wood surfaces to which, in accordance with the Italian Ministerial Decree of 6th March 1992, it confers class 1 (one) reaction to fire.

### QUICK FACTS

Very easy to apply

Resistant to chemical products

Standard approved Class 1 reaction to fire

### TECHNICAL NOTES

Catalysis ratio (vol/vol)	1:1
Degree of gloss	80
Completely dry (hours)	24 /48
Coverage per coat (g/m <sup>2</sup> )	150*

\* 3 coats are required

## Aqua Tenax Sport

Two component waterborne sealer  
specifically designed for sports flooring



5 Lt  
+  
1 Lt



Two component waterborne sealer featuring a high insulating capacity, excellent coverage, good sandability and ease of application on large surfaces. AQUA TENAX SPORT has been formulated specifically to guarantee the adhesion of coloured areas, markings and the subsequent finish on pre-finished floors.

### QUICK FACTS

#### APPROVED BY FIBA

Very easy to apply

Complies to standard EN 14904 – for sports flooring

Extraordinary chemical and mechanical resistance

### TECHNICAL NOTES

Catalysis ratio (vol/vol)	5:1
Completely dry (hours)	12
Dry for sanding (hours)	12
Overcoating without sanding (hours)	After 3, within 6

## Idro 2K Sport

Two component waterborne finish  
specifically designed for sports flooring



5 Lt  
+  
1 Lt



Two component waterborne fireproof finish recommended for treating wood surfaces to which, in accordance with the Italian Ministerial Decree of 6th March 1992, it confers class 2 (two) reaction to fire. In accordance with European standard EN 13501-1:2007, IDRO 2K SPORT has also been awarded the Cfl-s1 fire resistance classification which is valid for all wood based supports used for flooring. IDRO 2K SPORT provides wood floors with a level of resistance to wear, to sliding and a mirror finish that make it suitable for application on surfaces used for sports purposes in compliance with the specifications provided by the European standard EN 14904:2006.

### QUICK FACTS

#### APPROVED BY FIBA

Very easy to apply

Standard approved Class 2 resistance to fire

EC Cfl-s1 fire resistance classification

Complies with standard EN 14904 – sports flooring

Extraordinary chemical and mechanical resistance

### TECHNICAL NOTES

Catalysis ratio (vol/vol)	5:1
Degree of gloss	20
Dry for sanding (hours)	12
Overcoating without sanding (hours)	After 3, within 5
Coverage per coat (g/m <sup>2</sup> )	100*

\* Cfl-s1 = 3 coats are required (300)

\* Class 2 = 2 coats are required (240)

## Tenax FR - Idro 2K FR

Class 1 fireproof finish



5 + 5 Lt  
Tenax FR

5 + 0.5 Lt  
Idro 2K  
FR



Fireproof cycle consisting of a two component solvent based sealer (TENAX FR) and a two component waterborne finish (IDRO 2K FR). This cycle is recommended for treating wood surfaces to which, in accordance with the Italian Ministerial Decree of 6th March 1992, if it is applied according to the indications given in the technical data chart, it confers class 1 (one) reaction to fire. As established by the decree of 16th February 2009 which modifies and extends the Ministerial Decree of 15th March 2005, the wood floors finished with this cycle can be used where the Cfl – S1 reaction to fire is required (public areas including exit routes).

### QUICK FACTS

Very easy to apply

Standard approved class 1 resistance to fire

Extraordinary chemical and mechanical resistance

Low environmental impact

Available in three different glosses

#### TECHNICAL NOTES | Tenax FR

Dry for sanding (hours)	16
Coverage per coat (g/m <sup>2</sup> )	120

#### TECHNICAL NOTES | Idro 2K FR

Degree of gloss - 2K FR (gloss)	10
Degree of gloss - 2K EXPORT FR (gloss)	30
Degree of gloss - 2K SAT FR (gloss)	50
Completely dry (hours)	12
Overcoating without sanding (hours)	After 3, within 5
Coverage per coat (g/m <sup>2</sup> )	100*

\*2 coats are required



# Color Sport

Two component waterborne coloured treatment, specifically for sports flooring



Two component waterborne coloured treatment featuring excellent coverage, ease of application and excellent dilation for marking lines and games areas on sports floors. All the RAL shades can be created with COLOR SPORT.

QUICK FACTS	
APPROVED BY FIBA	
Excellent coverage	
Easy to use	
Available in all the RAL shades of colour	
Complies with standard EN 14904 – sports floors	

TECHNICAL NOTES	
Mixing ratio (vol/vol)	10:1
Overcoating without sanding (hours)	After 3, within 5

# Anti-slip Cleaner

Self-polishing anti-slip cleaner specifically designed for the maintenance of coated wood floors used for sport



Self-polishing, non-slip, fragranced, waterborne emulsion. ANTISLIP CLEANER has a multi-purpose protective action because apart from being non-slip, it increases the resistance to abrasion, it protects against sunlight (ANTI-UV) and it revives and restores worn floors. It can be used to clean and protect all types of wood floor.

QUICK FACTS	
APPROVED BY FIBA	
Anti-slip certificate	

TECHNICAL NOTES	
Application method	Cotton cloth, Vermeister Mop
Recommended frequency	According to the traffic but on average once a month







## Lega Stucco

Binder for fillers

10 Lt

Single component binder with a nitrocellulose base and other resins for the preparation of fillers for sealing wood floors.

QUICK FACTS	
Considerable plasticity	
Considerable adherence	
Suitable even for large cracks	

TECHNICAL NOTES	
Completely dry (min.)	30
Overcoating (min.)	30

## EXPERIENCE

Our experience in chemistry applied to wood flooring started from here. Experience is our range of traditional solvent-based products that are safe, fully tested and have been updated over time in compliance with the regulations in force.



## Lega Stucco Plus

Low odour binder for fillers

10 Lt

Single component solvent based binder for preparing fillers for sealing wood floors.

QUICK FACTS	
Low odour	
Long workability	
Excellent coverage	
Suitable for smoothing and sealing large cracks and/or knots	

TECHNICAL NOTES	
Completely dry (min.)	35
Overcoating (min.)	35

## Super Tenax

Two component polyurethane sealer

10 Lt  
+  
10 Lt



Sandable polyurethane sealer with exceptional mechanical qualities and high build. Suitable for extremely fast work cycles that can be completed with just 2 coats (one of SUPER TENAX and one finishing coat).

QUICK FACTS	
High build level	
Ideal for 2 coat cycles	
Fast drying	

TECHNICAL NOTES	
Catalysis ratio (vol/vol)	1:1
Dry for sanding (hours)	4
Pot-life (ore)	3
Overcoating (hours)	4
Overcoating for maximum performance (hours)	12



## Ultra Tenax

### Two component polyurethane sealer

10 Lt  
+  
10 Lt



Two component polyurethane sealer with a very high solid content. Formulated specifically for minimizing the risk of “stripping” with the consequent appearance of light patches when used together with two component waterborne finishes.

#### QUICK FACTS

High build level

Suitable for mixed cycles with two component waterborne finishes

Very high resistance to abrasion

Easy to sand

#### TECHNICAL NOTES

Catalysis ratio (vol/vol)	1:1
Dry for sanding (hours)	6 (Recommended 16)
Pot-life (ore)	3
Overcoating (hours)	6
Overcoating for maximum performance (hours)	16

## Hp 15

### Single component sealer

10 Lt



Single component sandable sealer with nitrocellulose base.

#### QUICK FACTS

Fast drying

Effective pore closure

Makes subsequent coats of paint uniform and limits their absorption

Considerable water repellent action

#### TECHNICAL NOTES

Completely dry (min.)	30
Overcoating (min.)	30

## Perfect

### Two component polyurethane finish

5 Lt  
+  
5 Lt



PERFECT offers unique characteristics such as the long open time which leads to an ease of application typical of the solvent based products formulated before 2007, a feature which is greatly appreciated in large rooms and in the case of application under critical environmental conditions. PERFECT is outstanding for its minimum tendency to show impurities present in the environment and for this reason it creates dimple-free finishes.

#### QUICK FACTS

Low odour

Long open time

Extremely easy to apply

Very low tendency to show dimpling

High mechanical resistance

#### TECHNICAL NOTES

Catalysis ratio (vol/vol)	1:1
Degree of gloss PERFECT 30 (gloss)	30
Degree of gloss PERFECT 60 (gloss)	60
Dry for sanding (hours)	24/48

## Samanta Isomatt S Isomatt

### Two component polyurethane finish

5 + 5 Lt  
Samanta

5 + 5 Lt  
Isomatt S

5 + 5 Lt  
Isomatt



Two component polyurethane finish featuring great ease of application, long workability and uniformity of finish. All these characteristics make it suitable as a finishing coat even in hot weather when a longer lapmark time is required.

#### QUICK FACTS

High solid content

High mechanical resistance

Excellent resistance to water and common cleaning products

Extremely easy to apply

#### TECHNICAL NOTES

Catalysis ratio (vol/vol)	1:1
Degree of gloss SAMANTA (gloss)	95
Degree of gloss ISOMATT S (gloss)	60
Degree of gloss ISOMATT (gloss)	40
Dry for sanding (hours)	24/36

## Flash

### Very fast drying single component sealer

5 Lt



Very fast drying single component sealer with a nitrocellulose base for wood floors. The rapid drying time makes the product particularly suitable for fast finishing cycles. It can be overcoated without sanding even using single component waterborne finishes.

#### QUICK FACTS

Very fast drying

Effective pore closure

Makes subsequent coats of paint uniform and limits their absorption

Can be overcoated without sanding

Considerable water repellent action

#### TECHNICAL NOTES

Completely dry (min.)	30
Overcoating (min.)	30

## V 15

### Single component sealer

10 Lt



Single component non-yellowing vinyl resin based sealer. Formulated specifically so that it can also be overcoated with single component solvent based polyurethane finishes, it is recommended particularly for all those cycles in which the colour change of the floor has to be limited.

#### QUICK FACTS

Fast drying

Effective pore closure

Makes subsequent coats of paint uniform and limits their absorption

Considerable water repellent action

#### TECHNICAL NOTES

Completely dry (min.)	30
Overcoating (min.)	30

## Oil Plus

### Single component oil modified urethane finish

5 Lt



Thanks to the use of innovative resins, technological additives and special drying agents, Oil Plus enables unique abrasion and scratch resistance characteristics to be achieved. As for application, the product is outstanding for its ease of use and for the long open time. OIL PLUS represents a valid alternative to the impregnation processes as it offers excellent protection for floors and does not require any particular maintenance operations.

#### QUICK FACTS

High mechanical resistance

Extremely easy to apply

#### TECHNICAL NOTES

Degree of gloss OIL PLUS X-MATT (gloss)	10
Degree of gloss OIL PLUS 30 (gloss)	30
Degree of gloss OIL PLUS 60 (gloss)	60
Dust free (hours)	2
Impression dry (hours)	3
Dry for sanding (hours)	24/48

## Unipol I Monosat

### Single component polyurethane finish

5 Lt  
Unipol

5 Lt  
Monosat



Products featuring a considerable hardness together with good elasticity, good coverage and exceptional resistance to abrasion which make them suitable for use even in places subject to the heaviest traffic.

#### QUICK FACTS

Considerable hardness and elasticity

High build level

Exceptional resistance to abrasion

#### TECHNICAL NOTES

Degree of gloss UNIPOL (gloss)	95
Degree of gloss MONOSAT (gloss)	70
Dry for sanding (hours)	24



<div><div>Cleaner</div><div>Solvent for removing residue adhesive from pre-finished wood floors</div></div> <div><div>1 Lt</div></div> <div><div>QUICK FACTS</div><div>Easy and effective removal and cleaning of stains</div><div>Does not affect common finishes used on pre-finished wood floors (preliminary tests are recommended)</div></div> <div><div>TECHNICAL NOTES</div><table><tr><td>Application method</td><td>Cotton cloth</td></tr></table></div>	Application method	Cotton cloth	<div><div>Safe Wood</div><div>Protective solution</div></div> <div><div>5 Lt</div></div> <div><div>QUICK FACTS</div><div>Solution of chemical substances capable of protecting wood over time. SAFE WOOD guarantees a high level of durability and is consequently recommended when using species of wood with little resistance, sapwood and in all those cases in which the floor may be more prone to alteration due to ageing.</div></div> <div><div>QUICK FACTS</div><div>Ideal for wood species with little resistance, sapwood and woods that are sensitive to changes due to ageing.</div></div> <div><div>TECHNICAL NOTES</div><table><tr><td>Overcoating (hours)</td><td>24</td></tr><tr><td>Application method</td><td>Roller, Brush</td></tr><tr><td>Average coverage per coat (g/m²)</td><td>80</td></tr></table></div>	Overcoating (hours)	24	Application method	Roller, Brush	Average coverage per coat (g/m²)	80	<div><div>Diluyente Extra</div><div>Mixture of solvents for thinning solvent based systems (not sealers or finishes)</div></div> <div><div>10 Lt</div></div> <div><div>QUICK FACTS</div><div>Suitable for thinning polyurethane primers and binders for fillers</div><div>It improves the flow of the binder/wood powder mixture</div></div>	<div><div>Diluyente Plus</div><div>Mixture of solvents for thinning impregnation systems</div></div> <div><div>5 Lt</div></div> <div><div>QUICK FACTS</div><div>Suitable for thinning Color.Oil - Pro.Oil - Fix.Oil - Deck.Oil - Deck.Oil Strong - Deck.Oil GS</div><div>Suitable for cleaning and maintaining tools used with Oil Plus</div></div>
Application method	Cotton cloth										
Overcoating (hours)	24										
Application method	Roller, Brush										
Average coverage per coat (g/m²)	80										
<div><div>AD 91</div><div>Anti-cissing additive for solvent based systems</div></div> <div><div>0,5 Lt</div></div> <div><div>An additive that improves the wettability of the sub-layer of solvent based finishes. It is recommended when pollutants are present on the floor.</div></div> <div><div>QUICK FACTS</div><div>This product eliminates or at least reduces cissing caused by residue silicone</div><div>Recommended for solvent based sealers and finishes</div></div>	<div><div>Solvente di lavaggio</div><div>Tool cleaning solvent</div></div> <div><div>10 Lt</div></div> <div><div>QUICK FACTS</div><div>Effective cleaning power</div><div>Does not affect the softness of the bristles or hairs on brushes and rollers</div><div>Ideal for the first cleaning and for keeping tools used with solvent based products in good condition</div></div>	<div><div>Diluyente Ritardante</div><div>LOW VOC</div><div>Mixture of low volatile solvents</div></div> <div><div>5 Lt</div></div> <div><div>QUICK FACTS</div><div>Increases the open time</div><div>Improves the flow of solvent based finishes</div><div>Does not increase the VOC of the coatings in which it is used</div><div>Use permitted in products subject to EC DIR. 2004/42</div></div>	<div><div>W-Cleaner</div><div>Tool cleaning solvent</div></div> <div><div>10 Lt</div></div> <div><div>QUICK FACTS</div><div>Ideal for cleaning and maintaining tools used with waterborne products</div><div>Does not affect the softness of the bristles or hairs on brushes and rollers used with waterborne products</div></div>								

62 |

| 63



Noi trattiamo solo un argomento, ma lo trattiamo bene: **IL PAVIMENTO IN LEGNO.**  
Il pavimento in legno è un vero e proprio investimento e come tale va salvaguardato.



MAINTENANCE

Vermeister dal 1975 non ha mai distolto le proprie attenzioni dal pavimento in legno per esplorare altri settori e questa **concentrazione unita all’esperienza, ci permette oggi di essere vero punto di riferimento in materia di trattamento e di manutenzione.** È infatti la **corretta manutenzione, la garanzia di lunga vita del pavimento in legno e per questa ragione abbiamo formulato una linea di prodotti “facili da usare” e di “assoluta efficacia”, che soddisfi ogni esigenza per qualsiasi tipo di trattamento o finitura.** E mentre sui pavimenti posti all’interno abbiamo a che fare con la polvere e con gli agenti chimici di uso comune che possono cadere a terra, su quelli posti in esterno (i più difficili da mantenere) facciamo fronte con successo a tutti gli agenti atmosferici.

**Vermeister Maintenance offre un sistema di prodotti di altissima qualità, formulati nel massimo rispetto dell’uomo e dell’ambiente,** che renderanno il tuo pavimento in legno bello in eterno, perché in Vermeister **abbiamo a cuore il tuo investimento.**



Detergente Neutro  
Neutral detergent for coated wood floors  
(routine maintenance)

1 Lt



A concentrated liquid with a powerful cleaning action and low level foaming; recommended for cleaning various surfaces such as coated wood floors, brickwork, marble, ceramic tiles, etc., without rinsing.

TECHNICAL NOTES	
Dilution in water for routine cleaning	2-3% (approx. capful for every 2 litres of water)
Application method	Cotton cloth, Vermeister Mop
Recommended frequency of use	once-twice a week

Idronet  
Maintenance wax for coated wood floors  
(routine maintenance)

1 Lt



Self-polishing fragranced water based cleaner containing detergents and perfumed essences. IDRONET carries out a dual action: it cleans dirt and revives the original finish of the floor. It can be used to clean and protect all types of coated wood floors including those finished with waterborne products.

TECHNICAL NOTES	
Dilution in water for ordinary cleaning	5% (approx. 1 capful for every litre of water)
Application method	Cotton cloth, Vermeister Mop
Recommended frequency of use	once-twice a month according to the traffic



Clean.Oil

Detergent for oil treated wood floors  
(additional maintenance)



A strong detergent designed specifically for a thorough cleaning of wood floors treated with oils from the W.Oil range, it is also ideal for removing old layers of maintenance products (soaps, waxes, etc.). The perfect balance of components ensures in-depth cleaning without attacking or damaging the wood fibres which, having been treated with natural oils, require particular care and attention.

TECHNICAL NOTES	
Dilution in water for additional maintenance	2-3% (approx. 1 capful for every 2 litres of water)
Application method	Cotton cloth, Vermeister Mop

Soap.Oil

Soap for oil treated wood floors  
(ordinary maintenance)



A natural, nourishing detergent for cleaning and maintaining wood floors with with oils from the W.Oil range,. This product is based on real coconut soap, the most sought-after natural detergent. It cleans and nourishes the wood fibres, giving the floor a particularly uniform and matt appearance. Do not use on coated floors.

TECHNICAL NOTES	
Dilution in water for routine cleaning	5% (approx. 1 capful for every litre of water)
Application method	Cotton cloth, Vermeister Mop
Recommended frequency of use	Once-twice a week (indoor floors) Once every 1-2 months (outdoor floors)

Life.Oil

Maintenance oil for oil treated wood  
floors (additional maintenance)



Maintenance oil for use on wood floors treated with FIX.OIL. Formulated with natural oils and waxes, it protects the wood and is used to restore worn floors to their initial appearance.

TECHNICAL NOTES	
Application method	Pad
Average coverage per coat (g/m²)	30/50
Interval before polishing (min.)	10/20
Ready for traffic (hours)	2/4

Oil.Care

Maintenance product for oil treated  
indoor and outdoor floors  
(ordinary maintenance)



OIL.CARE is an emulsion of waxes, natural oils, modified oils and special anti-UV additives for the maintenance of outdoor floors treated with DECK.OIL, DECK.OIL STRONG, DECK.OIL GS, ZERO.DECK, or indoor floors treated with products from the W.OIL range. Cobalt and Methyl Ethyl Ketoxime-free. The oily component of OIL.CARE repairs the treatment oil that has deteriorated due to exposure to atmospheric agents and penetrates into the wood providing in-depth protection. The water repellent wax prevents water from entering the pores in the wood, while the anti-UV additives delay the deterioration of the lignin. OIL.CARE is also suitable for protecting all wood products treated with impregnation products, both indoors and out (garden furniture, wooden partitions, beams, fences, etc.). Recommended especially as a protective treatment for WPC

TECHNICAL NOTES	
Application method	Roller, Brush, Pad, Beige Disc
Dilution in water	20/25%
Recommended frequency of use	once every 1-2 months
Ready for traffic (min.)	30
Ready for traffic to give maximum performance (hours)	12



## Deck.Reset

Pre-treatment for outdoor decking and wooden products (additional maintenance)



## Anti-slip Cleaner

Self-polishing anti-slip cleaner specifically designed for the maintenance of coated wood floors used for sport



## Sanit-Action Cleaner

Sanitizing cleaner for coated wood floors.



A highly effective watery solution for removing the grey patina on outdoor decking and wood products caused by the deterioration and washing away of the lignin. DECK RESET restores the original colour of the wood that is then protected with DECK OIL - DECK OIL STRONG - ZERO DECK. DECK.RESET can be used on decking, garden furniture, wooden gazebos and on all wood items located outdoors. Recommended especially as a strong detergent for WPC.

Fragranced, self-polishing anti-slip water based emulsion. ANTISLIP CLEANER has a multi-purpose protective action because apart from its non-slip feature it also increases resistance to abrasion, protects against sunlight (ANTI-UV) and restores and revives worn floors. It can be used to clean and protect all types of wood floors.

It acts in three ways: it sanitizes, deodorizes and cleans. Based on quaternary ammonium salts, the composition of the product guarantees extensive, in-depth sanitization by means of a vigorous mechanical removal of germs and bacteria from the surfaces treated. The action of benzalkonium chloride, a quaternary ammonium salt, is well-known for countering Gram-positive and Gram-negative bacteria and fungi through the inactivation of energy-producing enzymes, the denaturation of cellular proteins and the breakage of cellular membranes. The high wetting and cleaning power results in a considerable reduction of the surface tension and excellent adhesion to the surfaces, allowing an in-depth penetration of the surfactants and the removal of dirt in areas that are hard for traditional cleaners to reach. Unlike other cleaning products on the market, Sanit-Action Cleaner has been formulated specifically for wood floors and, due to the synergic combination of its components, it performs its sanitizing, cleaning and deodorizing action with maximum efficiency, leaving the wood fibre unaltered.

### QUICK FACTS

#### APPROVED BY FIBA

Anti-slip certificate

### TECHNICAL NOTES

Application method	Cotton cloth, Vermeister Mop
Recommended frequency of use	According to the traffic but on average once a month

### QUICK FACTS

Extensive, in-depth sanitization by removal of germs and bacteria

Suitable for countering the flu virus A (H1N1)

Suitable for enveloped viruses, including HBV – HCV

Suitable for viruses belonging to the Coronavirus family

Specifically designed for hardwood floors

### TECHNICAL NOTES

Dilution in water (everyday cleaning)	10%
Dilution in water (as a sanitizer)	1:1
Recommended frequency of use	1-2 times a week
Application method	Cotton cloth, Vermeister Mop
Stability and storage (in original, unopened containers stored in a cool,dry place)	12 months
Standard packaging (Lt)	1/5

### TECHNICAL NOTES

Application method	Spray, Roller, Brush, Pad
Average coverage per coat (g/m²)	50 with spray or pad application 80 with a roller or brush application
Operating time for using trowels, brushes, abrasive felts (min.)	10
Operating time for using pressure washers (min.)	from 10 to 20







# Maintenance product display stand

Elegant and practical display stand for maintenance products with a modern design that suits all interiors. Designed with attention to every detail to ensure sturdiness and stability. Only for indoor use.

## THE DISPLAY STAND CONSISTS OF

96 1 litre bottles (choice of products) + 4 Merlino Kit



# Merlino Spray Mop

Special Mop with spray designed specifically for the daily maintenance of wood floors.

## KIT CONSISTS OF

- 1 Spray Mop
- Reusable Vermeister Mop in washable microfibre
- 1 litre Detergente Neutro

## QUICK FACTS

- Very easy to use
- Rechargeable
- Does not leave rings or marks
- Easy to manoeuvre to reach more difficult areas
- Can be used with all Vermeister Maintenance products
- Reduces the amount of water and cleaning products used



# Merlino

Complete maintenance kit **for finished** wood floors

## KIT CONSISTS OF

- Merlino Telescopic handle with 360% swivel base
- Reuseable Vermeister Mop in washable microfibre
- 2 electrostatic cloths
- 1 litre Detergente Neutro
- 1 litre Idronet



# Merlino W.Oil

Complete maintenance kit **for oiled** wood floors

## KIT CONSISTS OF

- Merlino telescopic handle with 360% swivel base
- Reuseable Vermeister Mop in washable microfibre
- 2 electrostatic cloths
- 1 litre Soap.Oil
- 1 litre Oil.Care





MACHINERY AND ABRASIVES



SINGLE DISC MACHINE JUST 33 CODE 604024

Brush Ø (mm)	330
Voltage (V)	220 - 240
Frequency (Hz)	50
Motor power (W)	550
Brush pressure (g/cm²)	36,7
Motor passage height (mm)	260
N. brush revs. (rpm)	190
Weight (Kg)	22
Wire length (m)	12
Auxiliary socket	no
Noise level (dbA)	< 54
Drive	Nylon gears



SINGLE DISC MACHINE JUST 43 EH CODE 604020

Brush Ø (mm)	430
Voltage (V)	220 - 240
Frequency (Hz)	50
Motor power (W)	1600
Brush pressure (g/cm²)	43,3
Motor passage height (mm)	330
N. brush revs. (rpm)	227
Weight (Kg)	44
Wire length (m)	15
Auxiliary socket	yes
Noise level (dbA)	< 56
Drive	Steel gears



PAD DRIVER DISC - 330 MM

CODE 604044


Pad driver disc.



PAD DRIVER DISC - 430 MM

CODE 604042

Pad driver disc.



ABRASIVE DRIVER DISC - 330 MM

CODE 604045

Driver disc for abrasive discs.



ABRASIVE DRIVER DISC - 430 MM

CODE 604040

Driver disc for abrasive discs.



CARBORUNDUM GRINDING WHEEL  
430 MM

CODE 604112

Accessory for smoothing uneven and gapped screeds.



POLISHING BRUSH 430 MM

CODE 604061

Polishing brush.



MEISTER DISK LIGHT

CODE 604148

Disc with six fixed supports and Velcro attachment for a higher quality smoothing of wood floors.



VHQ 16, 24, 36 GRIT DISC - 430 MM

CODE 604180 GR. 16

CODE 604181 GR. 24

CODE 604182 GR. 36

Widia disc for removing film-forming finishes and resins and preparing cement screeds.



MEISTER DISK

CODE 604130

MEISTER DISK has been created and designed to improve all the work carried out with a single disc machine. The high level rotation of the six satellites forming MEISTER DISK, combined with the special accessories, guarantee that the machine is easy to handle and stable in the most demanding situations and applications. The body made entirely of metal together with the right weight/size proportion make MEISTER DISK an essential tool suitable for all machining work. A planetary disc with 6 idle satellites, made of metal, Bblock blocking system.



MEISTER CARTA

CODE 604132

MEISTER DISK with MEISTER CARTA, thanks to its particular design and the possibility of using entrainment mousse of different hardnesses, it allows an excellent smoothing operation to be carried out on all types of wood flooring. Thanks to its larger diameter, MEISTER CARTA enables the machine to be used close to the perimeter walls, in some cases without needing an edge smoothing machine. Abrasive disc driver Ø 115, Velcro attachment, metal support, Bblock blocking system.





**MULTI-PURPOSE MDX DISC**  
CODE 604133

MDX is ideal for carrying out different jobs that are necessary before starting to lay a wood floor such as smoothing the cement screed, removing the old adhesives and residue mousse, levelling and ruling ceramic tile, marble and granite floors. MDX is a multi-purpose accessory designed to be used with 17" single disc machines commonly used by all professionals and it is adapted to the various models simply by changing the driving flange. Its reduced weight and the central stabiliser disc mean that it can also be used by non-experts. The secret of the MDX disc is the ease with which the tools are replaced, a feature that makes it both efficient and economical.



**MDX DIAMOND** CODE 604144

Tool with diamond inserts, ideal for smoothing floors in ceramic tiles, marble floor tiles, granite and porcelain stoneware.



**MEISTER/MDX MOLA** CODE 604136

Cylindrical grinding wheel made of carborundum ideal for smoothing and levelling cement screeds, to remove seams made with trowels, dipping and old plaster and mortar. It leaves the surface very smooth.



**MDX VIDIA** CODE 604146

Tool with hard metal inserts, ideal for removing old adhesive, carpet mousse and excess cement material.



**TWIN EDGER SANDER**  
CODE 604002

Current / Voltage (V)	Single phase 220
Motor power (CV/KW)	2,6 / 2
Disc speed (rpm)	3000
Disc diameter (mm)	178
Arm length (mm)	305
Arm height (mm)	40
Weight (kg)	17
Guarantee (months)	12



**BULL BELT SANDER**  
CODE 604000

Current / Voltage (V)	Single phase 230
Motor power (CV/KW)	3,5 / 2,5
Roller width (mm)	200
Roller diameter (mm)	180
Size of abrasive belt (mm)	200 x 750
Weight (kg)	85
Guarantee (months)	12



**VACUUM UNIT**  
CODE 604030

Vacuum unit for collecting dust - Motor 1000 W Capacity 9 Lt. (only dust)



**TANK**  
CODE 604050

Tank for cleaning solutions - Capacity 12 Lt.



**ABRASIVES**

A range of versatile abrasives dedicated exclusively to the wood floor market, offering many qualities and an infinite number of products capable of satisfying every need. To guarantee a high standard of sanding every time, we can count on three different abrasives Zirconium, Aluminium Oxide and Aluminium Oxide Ceramic.

**DUST SKIRT**  
CODE 604101

Dust skirt for Just single disc machine



Dust / liquid vacuum cleaner with high power motor.

<b>VACUUM CLEANER 1200</b> CODE 604080		
Maximum power (W)	1200	Wire length (m) 7,5
Tank capacity (Lt.)	25	Weight without accessories (kg) 8,7
<b>VACUUM CLEANER 1300</b> CODE 604085		
Maximum power (W)	1300	Wire length (m) 7,5
Tank capacity (Lt.)	35	Weight without accessories (kg) 12,5



**CLOTH BELTS 203 X 750 MM**  
ZIRCONIUM Z JOINT

GRIT	Q.TY	CODE
24	10	800000
36	10	800001
40	10	800002
50	10	800003
60	10	800004
80	10	800005
100	10	800006
120	10	800007




**CLOTH BELTS 203 X 750 MM**  
CERAMIC Z JOINT

GRIT	Q.TY	CODE
24	10	800008
36	10	800009
40	10	800010
50	10	800011
60	10	800012
80	10	800013
100	10	800014
120	10	800015





**203 MM ROLLS**  
OF ZIRCONIUM ABRASIVE CLOTH




GRIT	METERS	CODE
24	25	800101
36	25	800102
40	25	800104
50	25	800106
60	25	800108
80	25	800110
100	25	800112
120	25	800114

**203 MM ROLLS**  
OF ALUMINIUM OXIDE ABRASIVE



GRIT	METERS	CODE
36	25	800120
40	25	800122
50	25	800124
60	25	800126
80	25	800128
100	25	800130
120	25	800132

**DOUBLE DISCS Ø 425 MM**  
IN SILICON CARBIDE



GRIT	Q.TY	CODE
16	10	800300
24	10	800301
36	10	800302
60	10	800003
80	10	800304
100/120	10	800305

**SMALL PAPER DISCS WITH**  
**VELCRO Ø 200 MM** ZIRCONIUM



GRIT	Q.TY	CODE
36	50	800320
60	50	800322
80	50	800323
100	50	800324
120	50	800325

**ABRASIVE SCREENS**  
ABRASIVE SCREENS Ø 406 MM IN CARBORUNDUM



GRIT	Q.TY	CODE
60	10	700500
80	10	700502
100	10	700504
120	10	700506
150	10	700508
180	10	700510
220	10	700512
320	10	700514

**MULTIPAD ABRASIVES DISCS**  
WITH VELCRO Ø 406 MM



GRIT	Q.TY	CODE
40	10	700600
60	10	700602
80	10	700604
100	10	700606
120	10	700608
150	10	700610
180	10	700612
220	10	700614

**SMALL PAPER DISCS WITH**  
**VELCRO Ø 180 MM** ZIRCONIUM



GRIT	Q.TY	CODE
36	50	800341
60	50	800344
80	50	800345
100	50	800346
120	50	800347

**SMALL PAPER DISCS WITH**  
**VELCRO Ø 140 MM H. 30 MM** ZIRCONIUM



GRIT	Q.TY	CODE
36	100	800360
60	100	800362
80	100	800363
100	100	800364
120	100	800365

**CLEANING PADS**  
16" CLEANING PADS



COLOUR	Q.TY	CODE
WHITE	5	800200
BEIGE	5	800201
GREEN	5	800202
RED	5	800203
BLACK	5	800205
PAD Hi-Pro Ø 432		
COLOUR	Q.TY	CODE
BLACK	5	900406

**FELT DISCS**  
17" FELTS



Sanding Pad Ø 406		
COLOUR	Q.TY	CODE
BORDEAUX	5	800221
Felt Pad ø 406		
COLOUR	Q.TY	CODE
GREY	10	800210
Felt wool Pad ø 406		
COLOUR	Q.TY	CODE
WHITE	5	800222

**SMALL PAPER DISCS WITH**  
**VELCRO Ø 115 MM** ZIRCONIUM




GRIT	Q.TY	CODE
36	100	800380
60	100	800382
80	100	800383
100	100	800384
120	100	800385

**SMALL PAPER DISCS WITH**  
**VELCRO Ø 105 MM** ZIRCONIUM



GRIT	Q.TY	CODE
36	100	800400
60	100	800402
80	100	800403
100	100	800404
120	100	800405



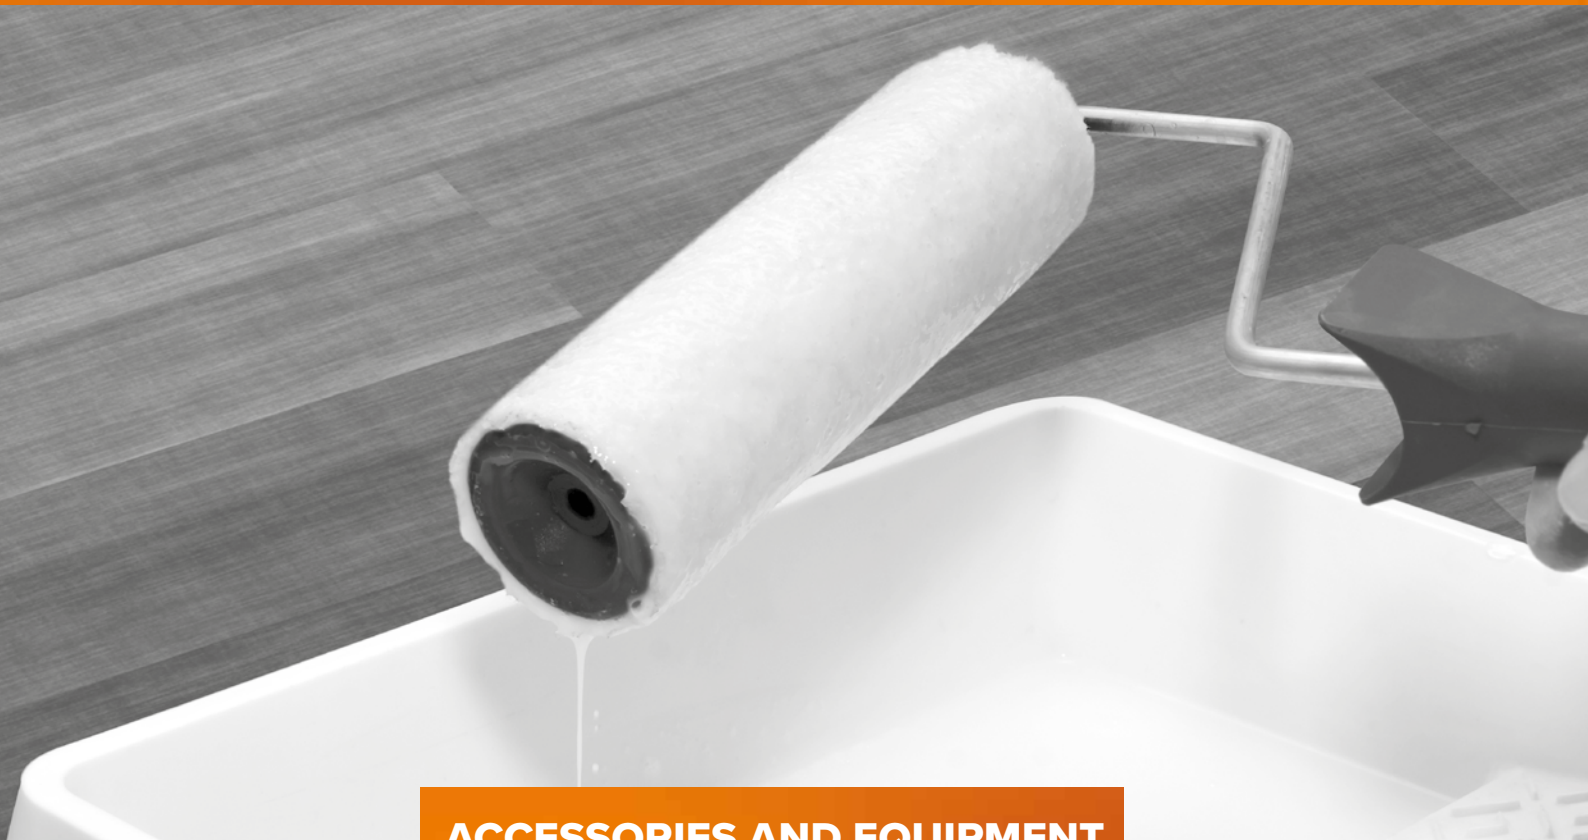

## ACCESSORIES AND EQUIPMENT

### CARBIDE HYGROMETER CODE 602300

CM-Gerät CLASSIC is a device based on the calcium carbide method used to determine the level of humidity in building materials that have set as well as in other different materials. Recommended by various associations for a series of measuring tasks, this method has been recognised for years together with the electronic measuring method.



### HYDROMETTE COMPACT B CODE 602202

An electronic device for measuring humidity in building materials. Measuring range: 0 –100 digits. The device operates on the patented measuring principle of a high frequency dielectric constant. With an LCD digital indicator and ball probe for the non-destructive location of humidity in building materials of all types as well as for detecting the spread of humidity in walls, ceilings and floors.



### HYDROMETTE COMPACT CODE 602146

An electronic device to measure the humidity of firewood. Measuring range: 5 up to 50% humidity of the wood with a calibration of the average value for softwood and hardwood as well as a large 3 figure LCD indicator. An economical device ideal: for protecting the environment thanks to reduced emissions, for protecting stoves and fireplaces thanks to improved combustion, for saving money thanks to an improved energy output



### HYDROMETTE COMPACT TF CODE 602203

A device for measuring the temperature and humidity of the air. Measuring range: from 5 to 98% relative humidity of the air from –15 up to +50 °C. A small and precise thermohygrometer in a compact case for many fields of application. With a built-in measuring probe, single-handed use, large LCD with 2 lines to show the humidity and temperature of the air at the same time. Users can regulate the device.



### HYDROMETTE HT 85 T CODE 602110

An electronic instrument with three functions to measure the humidity of wood and building materials as well as the temperature of solid and loose products, liquids and gases. LCD digital display, division of the type of wood into four categories and automatic temperature compensation. Range of measurements for wood: from 4 to 100% humidity, for building materials from 0 to 80 digits/display units (0.5 up to 25% of the weight) (convertible into percentage of humidity according to the type of material, e.g. gypsum, mortar, cement screed, concrete, etc.). Range of temperature measurements with Pt 100: -50 up to 199.9°C with 10 types of interchangeable probes. Precision measurements of timber (up to 180 mm thick), chipboard panels, veneering and building materials that have set.



### HYDROMETTE HB 30 CODE 602100

Three-function electronic measuring device. This measuring device with digital LCD can set the type of wood in 2 groups.



### MULTIMASTER CODE 601550

Professional multi-purpose tool for all types of restoration and repair work, with specific accessories for each application.



### CUTTING BLADE CODE 601554

Universal cutting blade



### STANDARD SLIDING BLOCK CODE 601552

Standard sliding block



### CUTTING BLADE CODE 601556

Universal cutting blade



More accessories than the above mentioned available.



CUTTING MACHINE TM33W  
CODE 604004



DOOR CUTTER 1300  
CODE 601520




STEM GUNS - 310 ML  
CODE 601501 | CODE 601503



TUBE GUNS - 600 ML  
CODE 601500



LAMINATE FLOORING  
GUILLOTINE  
CODE 601510



MIXER MX1300E  
CODE 604160



SANDER BA81  
CODE 601600



SANDER GL040E  
CODE 601602




REPAIR KIT  
CODE 601101



TROWELS	
DESCRIPTION	CODE
Adhesive trowel n. 5	601408
Adhesive trowel n. 6	601422
Double blade trowel 27 cm	601420
Smooth stainless steel trowel	601423
Smooth stainless steel float	601421



CLAMPING BELT  
CODE 601512



BEATER  
CODE 607203



PROTECTION	
DESCRIPTION	CODE
Dust respirator with valve	601201
Fume respirator	601203
Pro knee pads	601102
Goggles	601103
Ear defenders	601100
Tyvech coverall	601105
Pro trousers	601104



CLAMPING GRIPPERS  
CODE 601514



PLANK STRETCHER  
CODE 607152



PLANK STRETCHER 31 | 41  
CODE 607150 | CODE 607151



NON-MARKING RUBBER  
HAMMER  
CODE 607201



COATING ROLLERS  
AND ACCESSORIES

DESCRIPTION	CODE
Grating handle	601305
Spare mohair roller 4 mm	601301
Spare mohair roller 6 mm	601300
Spare textile roller 8 mm	601302
Spare textile roller 6 mm	601304
Spare textile roller 10 mm	601316
Spare black roller 2.5 mm	601303
Complete roller for primers	601306
Complete roller for Ceradura Hardwax	601340
Brush for edges	601403
Aluminium telescopic rod 2.5 m	601307
Roller cleaning scraper	601310
Roller holder	601308
Super roller holding container	601309
Tray with wheels for finishes	601404
Bags for finishes	601405
Dosing jug	601406







This catalogue has been printed on 100% recycled paper, certified by FSC Recycled and the European Ecolabel. Recycled paper: numerous benefits for the environment. Recycled paper leads to:

- a new life for used paper, prolonging its life cycle
- an energy saving with a reduction in the consumption of water and atmospheric pollution;
- a reduction in the use of virgin fibres from trees;
- a development of the local economy: used paper is collected by local firms

These aspects in turn lead to many other advantages: environmental benefits, thanks to reduced transportation, economic benefits due to the collection of used paper for recycling and social benefits as a result of the creation of local jobs.

Recycled paper counters global warming in two ways:

- it reduces the emission of CO<sub>2</sub> thanks to a process that uses less energy than the production of paper from virgin fibres;
- it delays the emission of CO<sub>2</sub> because wood-based products from cultivated forests, like paper, store carbon;

As the carbon is retained in the cellulose fibre without returning to the atmosphere, for example as a result of recycling, the wood-based products from cultivated forests, such as paper, contribute towards slowing down the climatic change. Significant savings are also made in terms of natural resources. For example, printing 5,000 brochures on A4 size paper with 28 pages inside and 4 cover pages using recycled paper instead of standard paper leads to a saving that is the equivalent of: (source: CEPI – Confederazione delle industrie europee della carta).

- a 658 km. journey made in an average European car
- the amount of water used in 85 days by an Italian
- the average amount of electricity used in 106 days by an Italian

Sources: the carbon footprint assessment is made by FactorX in compliance with the Bilan Carbone® method. The calculations are made by comparing recycled paper and virgin fibre paper and on the basis of the latest data provided by the European BREF (for virgin fibre paper). The results obtained derive from technical information and are subject to modification.

Vermeister S.p.A. guarantees that the information contained in this catalogue is provided to the best of the company's experience and technical-scientific knowledge and is given as a guideline only and with reference to the characteristics of standard products. Therefore, Vermeister S.p.A. cannot assume any responsibility for the results obtained which depend on the conditions of application that are beyond the company's control.



**VERMEISTER S.p.A**

Località Fornaci 24050 Mornico al Serio (BG) - ITALY  
Tel. +39 035 4428190 - Fax +39 035 4428075  
[www.vermeister.com](http://www.vermeister.com) - [info@vermeister.com](mailto:info@vermeister.com)

**Vermeister Canada**

Montréal-Est, Québec H1B5W1  
[info@vermeistercanada.com](mailto:info@vermeistercanada.com) - [www.vermeistercanada.com](http://www.vermeistercanada.com)

**Vermeister America, Inc.** - POULSBORO WA 98370

[info@vermeisterusa.com](mailto:info@vermeisterusa.com) - [www.vermeisterusa.com](http://www.vermeisterusa.com)  
US Operation - 119 Foster St., Rear Bldg #4-Peabody  
MA 01960 Tel. +1-800-854-7420 - Fax +1-888-854-5452

**Vermeister Iberica S.L.** Avenida de Brasil, 17 PL 16

28020 Madrid - Tel. +34 911 610 421  
[comercial@vermeister.es](mailto:comercial@vermeister.es) - [www.vermeister.com](http://www.vermeister.com)

**Vermeister Turkey** Sülün Sokak No: 6 PK 34330

Levent, Beşiktaş - İstanbul  
Tel. +90 (212) 2836500 - +90 (216) 3699050  
[info@vermeisterturkey.com](mailto:info@vermeisterturkey.com) - [www.vermeisterturkey.com](http://www.vermeisterturkey.com)

**Vermeister Rus** 119261, г. Москва, ул. Панферова, д. 12

Телефон: +7 (499) 783-55-80  
[vermeister@vermeisterrus.ru](mailto:vermeister@vermeisterrus.ru) - [www.vermeisterrus.ru](http://www.vermeisterrus.ru)

**Vermeister AT** Sechshauserstrasse 79

1150 WIEN (AT) +43 660 777 2009  
[office@juri-parkett.at](mailto:office@juri-parkett.at) - [www.vermeister.at](http://www.vermeister.at)

**Vermeister China Co., Ltd**

L3A, HWC, Zhuguang Road, Qingpu District  
Shanghai, China - Tel: +86 (0) 21-52832881  
[lzz@mrzmn.com](mailto:lzz@mrzmn.com) - [www.vermeister.cn](http://www.vermeister.cn) - [www.mrzmn.com](http://www.mrzmn.com)

**Vermeister Brasil**

Av. Marques de São Vicente, 420 - Barra Funda - São Paulo/SP  
Tel. +55 (11) 3667-0340  
[www.vermeisterbrasil.com.br](http://www.vermeisterbrasil.com.br)  
[andre@ajkcasadoraspador.com.br](mailto:andre@ajkcasadoraspador.com.br)  
[info@vermeisterbrasil.com.br](mailto:info@vermeisterbrasil.com.br)